


Parts & Accessories

Base for 4 $\frac{5}{16}$ ", 5", 5 $\frac{5}{8}$ "

Diameter Motors

Refer to Stock Numbers 1181A and 1182A.
For mounting rings and mounting clips.

Requires 2 $\frac{1}{2}$ " dia. ring.

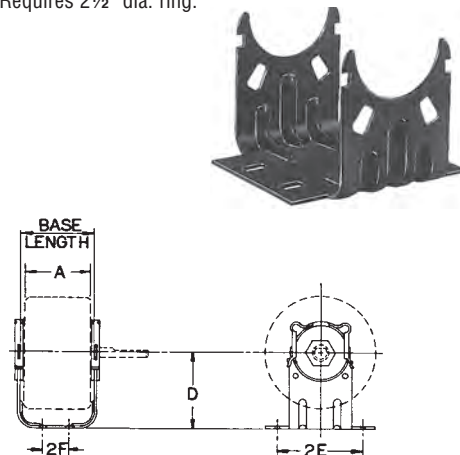

For use on Universal Electric® brand motors.

Base HT."D"	"A" Lengths 5 $\frac{5}{8}$ " & 5" DIA	"A" Lengths 4 $\frac{5}{16}$ " DIA.	Base Stock No.	"2E"	"2F"	Base Length
2 $\frac{11}{16}$ "	3 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	1205	3 $\frac{7}{8}$ "	1 $\frac{1}{16}$ "	3.937"
2 $\frac{11}{16}$ "	3 $\frac{3}{4}$ "	3 $\frac{1}{2}$ "	1206	3 $\frac{7}{8}$ "	1 $\frac{1}{16}$ "	4.187"
2 $\frac{11}{16}$ "	4 $\frac{1}{4}$ "	4"	1207	3 $\frac{7}{8}$ "	1 $\frac{1}{16}$ "	4.687"
2 $\frac{11}{16}$ "	5"	4 $\frac{3}{4}$ "	2090	3 $\frac{7}{8}$ "	1 $\frac{1}{16}$ "	5.437"
3"	3 $\frac{1}{4}$ "	3"	1342	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	3.667"
3"	3 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	2061*	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	3.917"
3"	3 $\frac{3}{4}$ "	3 $\frac{1}{2}$ "	1211	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	4.167"
3"	4"	3 $\frac{3}{4}$ "	1422	4 $\frac{1}{4}$ "	2 $\frac{3}{4}$ "	4.417"
3"	4 $\frac{1}{4}$ "	4"	1212	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	4.667"
3"	4 $\frac{1}{2}$ "	4 $\frac{1}{4}$ "	1226	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	4.917"
3"	4 $\frac{3}{4}$ "	4 $\frac{1}{2}$ "	1292	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	5.167"
3"	5 $\frac{1}{4}$ "	5"	1293	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	5.667"
3"	5 $\frac{1}{4}$ "	5"	1340	4 $\frac{1}{4}$ "	2 $\frac{3}{4}$ "	5.667"
3 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	3"	1343	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	3.667"
3 $\frac{1}{2}$ "	3 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	2062*	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	3.917"
3 $\frac{1}{2}$ "	3 $\frac{3}{4}$ "	3 $\frac{1}{2}$ "	1209	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	4.167"
3 $\frac{1}{2}$ "	4"	3 $\frac{3}{4}$ "	2044	4 $\frac{1}{4}$ "	2 $\frac{3}{4}$ "	4.417"
3 $\frac{1}{2}$ "	4 $\frac{1}{4}$ "	4"	2063*	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	4.667"
3 $\frac{1}{2}$ "	4 $\frac{1}{2}$ "	4 $\frac{1}{4}$ "	1229	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	4.917"
3 $\frac{1}{2}$ "	4 $\frac{3}{4}$ "	4 $\frac{1}{2}$ "	1347	3 $\frac{5}{16}$ "	1 $\frac{1}{16}$ "	5.167"
3 $\frac{1}{2}$ "	5 $\frac{1}{4}$ "	5"	1419	4 $\frac{1}{4}$ "	2 $\frac{3}{4}$ "	5.667"

* Has Extra Mounting Slot for TRANE 3 Point Mount.

Clamps

For Ring O.D. Part #
2.25" 613156-003

1 Per Pack

For Ring O.D. Kit #
2.50" *619432-169 (2 clamps)

2 Per Pack *Item to be discontinued when stock is depleted.




Mounting Clip

Stock No. 1181A

Use with Stock Numbers 1182A & 1220A

2 Per Pack



Two Piece Mounting Clip

Stock No. 1180A

Use with Stock Numbers 1182A & 1220A


2 Per Pack



Rubber Mounting Ring With Steel Band

Stock No.	Hub Ring Diameter	Motor Diameters
1220A	2 $\frac{1}{4}$ "	4 $\frac{5}{16}$ "-5"-5 $\frac{5}{8}$ "
1182A	2 $\frac{1}{2}$ "	4 $\frac{5}{16}$ "-5"-5 $\frac{5}{8}$ "
1255A	1 $\frac{3}{4}$ "	3 $\frac{3}{8}$ "

2 Per Pack



Rubber Mounting Ring

Stock Numbers 1219A, 1263A, 1387A

For round hubs — **Stock No. 1387A** - 2" O.D. for 4 $\frac{5}{16}$ " diameter motors

Stock No. 1219A - 2 $\frac{1}{2}$ " O.D. For 4 $\frac{5}{16}$ "- 5"-5 $\frac{5}{8}$ " diameter motors

Stock No. *1263A - 2 $\frac{1}{4}$ " O.D. For 3 $\frac{3}{8}$ " diameter motors

*Item to be discontinued when stock is depleted.

2 Per Pack



Adapter Ring

Stock No. 1221A

2 required per mounting ring to adjust from 2 $\frac{1}{4}$ " to 2 $\frac{1}{2}$ "

Use to convert Stock No. 1220A mounting ring to larger diameter.

2 Per Pack

