



QUICK DISCONNECT CORDSET & RECEPTACLE for NEXUS SERVO MOTORS

**NXQD1FM FEMALE CORDSET
NXQD1M MALE CONNECTOR**

DESCRIPTION

The Fireye NXQD1FM cordset and the NXQD1M receptacle provides a quick disconnect option for the NEXUS or PPC servomotors NX04, NX20, NX50 & NX98.

The NXQD1FM is a six conductor cordset. Three (3) conductors are used for the servomotor power/direction while the three (3) shielded conductors are used for the signal/position feed back to the Nexus or PPC controller.

SPECIFICATIONS

Materials & Finishes

| | |
|-----------------|-------------------------------|
| Shells: | High Specification Zinc Alloy |
| Inserts: | Nylon, UL94V-0 |
| Coupling Rings: | Brass |
| Contacts: | High Reliability Copper Alloy |
| Platings: | Gold Flash |
| Seals: | Rubber |

Electrical Data

| | |
|--------------------|----------------------------|
| Operating Voltage: | Up to 250 Vac rms. |
| Test Voltage: | 500 Vac rms test potential |
| Current Rating: | 5 Amps |
| Wire Size: | All wires are #18 AWG |



Mechanical

Contact Type: Crimp
Number of circuits: Six (6)
Contact Insertion: From Rear. No insertion tool needed. Removal with proper extraction tool (front release)
Nexus Adapter: From Male Pins connector to M16 threads on the NX20/50/98. A nut is required on the NX04.

WIRING


NXQD1FM Cordset

| CABLE SPECS | PINOUT | NEXUS CONTROLLER | PPC5000 |
|-------------------------|--------|------------------|----------------|
| 18AWG White | A | PE1/4/7/10* | PD18/13/10/4* |
| 18AWG Red | B | PE2/5/8/11* | PD17/12/9/3* |
| 18AWG Black | C | PE3/6/9/12* | PD16/11/8/2* |
| SHIELDS | | *Grounding Bar | *Grounding Bar |
| 18AWG White/Blue Stripe | D | PB4 | (L2) PA3 |
| 18AWG Red/White Stripe | E | PA2/4/6/8 | PE3/5/8/10 |
| 18AWG Blue/White Stripe | F | PA3/5/7/9 | PE2/4/7/9 |

NXQD1M Receptacle

| CABLE SPECS | PINOUT | NEXUS MOTOR NX-04/20/50 | NEXUS MOTOR NX98 |
|-------------------------|--------|----------------------------|------------------|
| 18AWG White | A | 5 | 6 |
| 18AWG Red | B | 6 | 5 |
| 18AWG Black | C | 7 | 4 |
| 18AWG White/Blue Stripe | D | 1 | 1 |
| 18AWG Red/White Stripe | E | 2 (3) | 2 (3) |
| 18AWG Blue/White Stripe | F | 3 (2) | 3 (2) |

DIMENSIONS

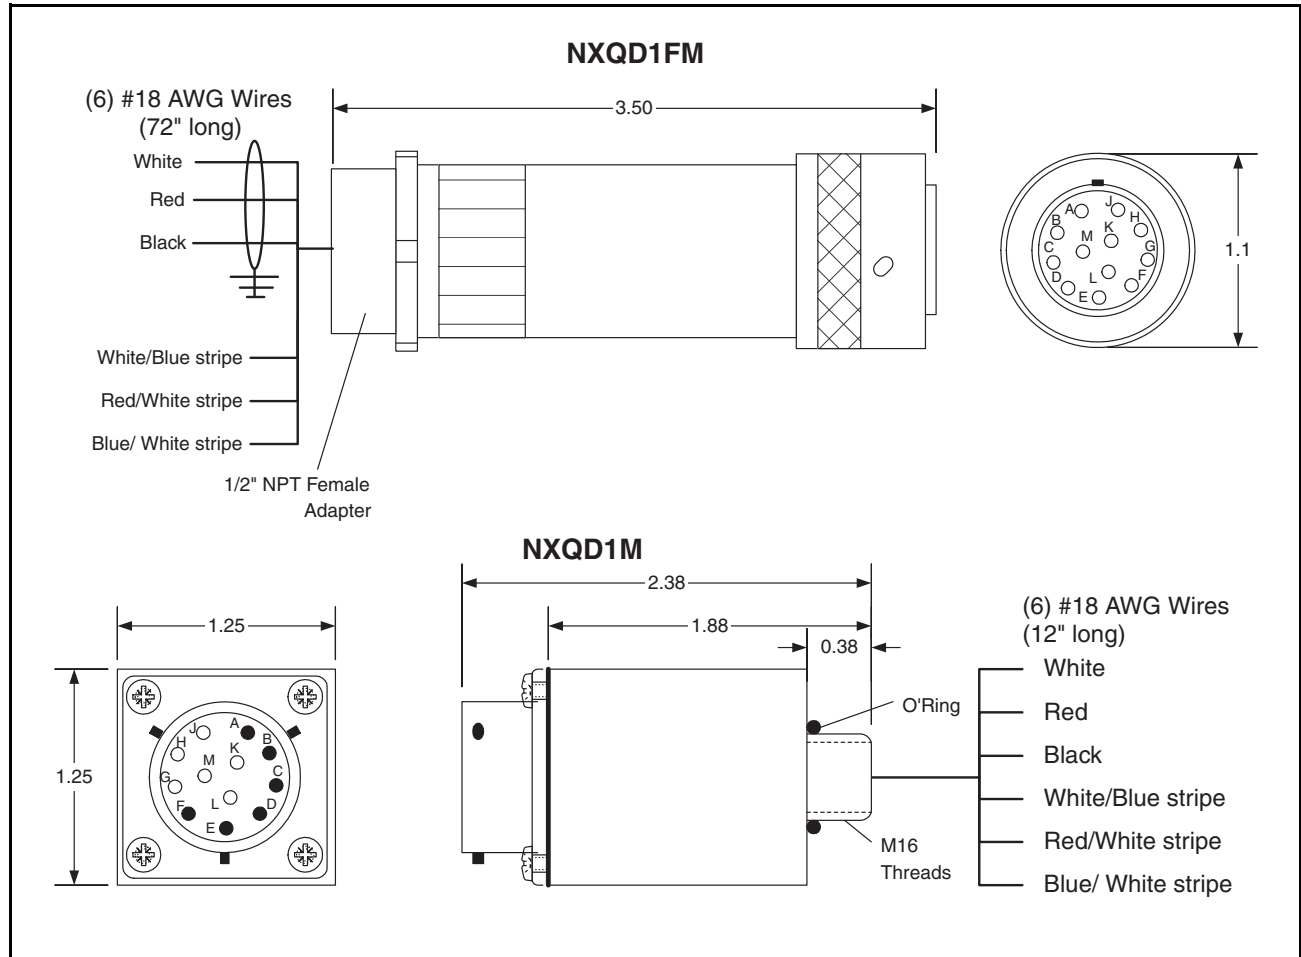

ORDERING INFORMATION

| P/N | DESCRIPTION |
|------------------|---|
| NXQD1FM (FEMALE) | Cordset six (6) feet long ready for 1/2" NPT flexible conduit installation with 6 pins quick disconnect Female connector. |
| NXQD1M (MALE) | Male six (6) pins quick disconnect with Nexus M16 Adapter and 12" leads to fit on NX04/20/50 and 98 motor. |



NOTICE

When Fireeye products are combined with equipment manufactured by others and/or integrated into systems designed or manufactured by others, the Fireeye warranty, as stated in its General Terms and Conditions of Sale, pertains only to the Fireeye products and not to any other equipment or to the combined system or its overall performance.

WARRANTIES

FIREEYE guarantees for *one year from the date of installation or 18 months from date of manufacture* of its products to replace, or, at its option, to repair any product or part thereof (except lamps, electronic tubes and photocells) which is found defective in material or workmanship or which otherwise fails to conform to the description of the product on the face of its sales order. **THE FOREGOING IS IN LIEU OF ALL OTHER WARRANTIES AND FIREEYE MAKES NO WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.** Except as specifically stated in these general terms and conditions of sale, remedies with respect to any product or part number manufactured or sold by Fireeye shall be limited exclusively to the right to replacement or repair as above provided. In no event shall Fireeye be liable for consequential or special damages of any nature that may arise in connection with such product or part.



FIREEYE®
3 Manchester Road
Derry, New Hampshire 03038 USA
www.fireeye.com

NXQD-1000
APRIL 18, 2013
Supersedes May 12, 2005