


GENERAL PURPOSE SWITCHING RELAYS

SMART ELECTRIC GENERAL PURPOSE SWITCHING RELAYS: Switching relays receive and control electrical signals. They are mainly used in the following applications:
Air Conditioning, Refrigeration, Heating Appliances, Fan Controls and Vending Machines.

FEATURES:

- Open coil to ensure cooler operation
- Magnet is laminated for higher efficiency
- Quick-connect coil terminals
- Base support designed for easy replacement
- Terminal numbers and circuit diagrams are molded on the case for easy installation and servicing
- Individually boxed

2-POLE
AIR CONDITIONING
RELAYS

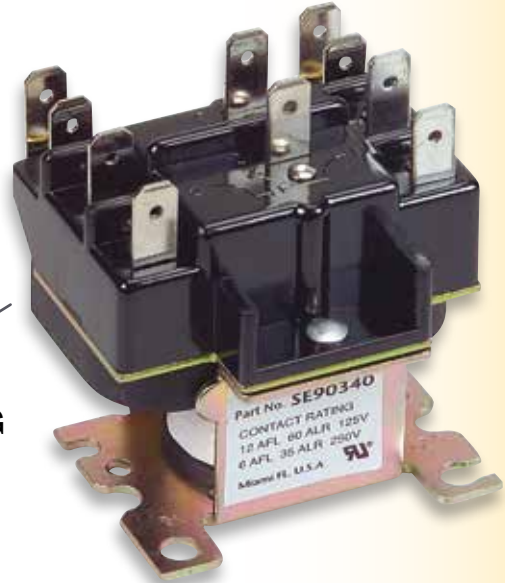

SWITCHING RELAYS

CALUS

| PART NO | COIL VOLTAGE | TERMINALS 1-2-3 | TERMINALS 4-5-6 |
|---------|--------------|-----------------|-----------------|
| SE90340 | 24 | Power | Power |
| SE90341 | 110/120 | Power | Power |
| SE90342 | 208/240 | Power | Power |

CONTACT RATING

| | POWER | | PILOT | |
|-------------------|-------|----------|-------|----------|
| | 120V | 208/240V | 120 | 208/240V |
| Full Load Amps | 12 | 6 | — | — |
| Resisting Amps* | 15 | 15 | 3 | 3 |
| Locked Rotor Amps | 60 | 35 | — | — |
| Horsepower | 3/4 | 3/4 | 1/10 | 1/10 |

*277 VAC

CROSS REFERENCE

| SMART ELECTRIC NO | WR/RBM NO | HONEYWELL NO |
|-------------------|-----------|--------------|
| SE90340 | 90-340 | R8222D1014 |
| SE90341 | 90-341 | R4222D1013 |
| SE90342 | 90-342 | R4222D1021 |

COIL DATA: 24-240 VAC @ 50/60 Hz; 21.5 VA Max. Inrush; 9.5 VA Max. Sealed

Smart Electric

TOLL FREE: 1-866-591-9898