



Technical Data	
Service	chilled, hot water, 60% glycol
Flow characteristic	modified equal percentage
Controllable flow range	82°
Sizes	2" to 30"
Type of end fitting	for use with ANSI 125/150 flanges
Materials	
Body	ductile iron ASTM A536
Body finish	epoxy powder coated
Disc	304 stainless steel
Seat	EPDM standard
Shaft	416 stainless steel
O-ring	EPDM
Bushings	RPTFE
Media temperature range	-22°F to 250°F [-30°C to 120°C]
Body pressure rating	ASME/ANSI Class 125/150
Close-off pressure	200 psi (2"-12"), 150 psi (14"-30")
Rangeability	10:1 (for 30° to 70° range)
Maximum velocity	12 FPS
Leakage	bubble tight

- 200 psi (2" to 12") and 150 psi (14"-30") bubble tight shut-off
- Long stem design allows for 2" insulation
- Valve face-to-face dimensions comply with API 609 & MSS-SP-67
- Completely assembled and tested, ready for installation

Application

These valves are designed to meet the needs of HVAC and commercial applications requiring bubble tight shut-off for liquids. Typical applications include chiller isolation, cooling tower isolation, change-over systems, large air handler coil control, bypass and process control applications. The large C_v values provide for an economical control valve solution for larger flow applications. Designed for use in Victaulic piping systems when mated to Victaulic 41 series flange nipples.

Jobsite Note

Valves should be stored in a weather protected area prior to construction. Complete installation recommendations can be found in Belimo's Installation and Maintenance Instructions for F6...HD Butterfly Valves.

		Valve		Type		Suitable Actuators			
		Nominal Size							
C_v 90°	C_v 60°	IN	DN [mm]	2-way	Spring	Non-Spring	Electronic Fail-Safe		
115	44	2"	50	F650HD	AF Series	AM	SY Series	DKR	GK
196	75	2½"	65	F665HD					
302	116	3"	80	F680HD					
600	230	4"	100	F6100HD		GM			
1022	392	5"	125	F6125HD	AF Series	DR			
1579	605	6"	150	F6150HD					
3136	1202	8"	200	F6200HD					
5340	2047	10"	250	F6250HD					
8250	3062	12"	300	F6300HD					
11917	4568	14"	350	F6350HD					
16388	6282	16"	400	F6400HD					
21705	8320	18"	450	F6450HD					
27908	10698	20"	500	F6500HD					
43116	16528	24"	600	F6600HD					
73426	28146	30"	750	F6750HD					

Valve	Size	C_v	MOD								ON/OFF
			10°	20°	30°	40°	50°	60°	70°	80°	
F650HD	2"	115	.06	3	7	15	27	44	70	105	115
F665HD	2-1/2"	196	.10	6	12	25	45	75	119	178	196
F680HD	3"	302	.20	9	18	39	70	116	183	275	302
F6100HD	4"	600	.30	17	36	78	139	230	364	546	600
F6125HD	5"	1022	.50	29	61	133	237	392	620	930	1022
F6150HD	6"	1579	.80	45	95	205	366	605	958	1437	1579
F6200HD	8"	3136	2	89	188	408	727	1202	1903	2854	3136
F6250HD	10"	5340	3	151	320	694	1237	2047	3240	4859	5340
F6300HD	12"	8250	4	234	495	1072	1911	3062	5005	7507	8250
F6350HD	14"	11917	6	338	715	1549	2761	4568	7230	10844	11917
F6400HD	16"	16388	8	464	983	2130	3797	6282	9942	14913	16388
F6450HD	18"	21705	11	615	1302	2822	5028	8320	13168	19752	21705
F6500HD	20"	27908	14	791	1674	3628	6465	10698	16931	25396	27908
F6600HD	24"	43116	22	1222	2587	5605	9989	16528	26157	39236	43116
F6750HD	30"	73426	37	2081	4405	9545	17011	28146	44545	66818	73426

F6 Series 2-Way, HD Butterfly Valve Resilient Seat, 304 Stainless Disc



Maximum Dimensions (Inches)

Valve	Size	C _v 90°	C _v 60°	A	B	C	D(Max)	BHC	No. of Holes	Lug Bolt	Actuator	Close-Off (PSI)	
F650HD	2"	115	44	1.65	9.00	9.00	19.50	4.75	4	5/8-11 UNC	AF	200	Spring Return
F665HD	2½"	196	75	1.81	9.00	9.00	20.00	5.50	4	5/8-11 UNC	2*AF	200	
F680HD	3"	302	116	1.81	9.00	9.00	20.50	6.00	4	5/8-11 UNC		200	
F6100HD	4"	600	230	2.05	8.00	8.00	21.00	7.50	8	5/8-11 UNC	2*GK	200	Electronic Fail-Safe
F650HD	2"	115	44	1.65	7.00	7.00	15.00	4.75	4	5/8-11UNC	AMB(X)	200	
F665HD	2½"	196	75	1.81	7.00	7.00	15.50	5.50	4	5/8-11UNC	GMB(X)	200	Non-Spring Return
F680HD	3"	302	116	1.81	8.00	8.00	16.00	6.00	4	5/8-11 UNC		200	
F6100HD	4"	600	230	2.05	8.00	8.00	21.00	7.50	8	5/8-11 UNC	2*GMB(X)	200	
F6100HD	4"	600	2.30	2.05	6.00	4.00	18.00	7.50	8	5/8-11 UNC	DR/DKR	200	
F650HD	2"	115	44	1.65	8.00	13.00	20.25	4.75	4	5/8-11 UNC	SY2...	200	
F665HD	2½"	196	75	1.76	8.00	13.00	20.75	5.50	4	5/8-11 UNC		200	
F680HD	3"	302	116	1.78	8.00	13.00	21.00	6.00	4	5/8-11 UNC		200	
F6100HD	4"	600	230	2.05	8.00	13.00	21.75	7.50	8	5/8-11 UNC		200	
F6125HD	5"	1022	392	2.19	8.00	13.00	22.25	8.50	8	3/4-10 UNC	SY3...	200	
F6150HD	6"	1579	605	2.19	8.00	13.00	22.75	9.50	8	3/4-10 UNC		200	
F6200HD	8"	3136	1202	2.37	12.00	15.00	29.00	11.75	8	3/4-10 UNC	SY4...	200	
F6250HD	10"	5340	2047	2.67	12.00	15.00	30.00	14.25	12	7/8-9 UNC		200	
F6300HD	12"	8250	3062	3.01	12.00	15.00	32.00	17.00	12	7/8-9 UNC	SY5...	200	
F6350HD	14"	11917	4568	3.02	12.00	15.00	33.00	18.75	12	1-8 UNC		150	
F6400HD	16"	16388	6282	4.01	12.00	15.00	34.50	21.25	16	1-8 UNC	SY6...†	150	
F6450HD	18"	21705	8320	4.50	14.00	21.00	39.25	22.75	16	1 1/8-7 UNC	SY8...†	150	
F6500HD	20"	27908	10698	5.00	14.00	21.00	41.50	25.00	20	1 1/8-7 UNC		150	
F6600HD	24"	43116	16528	6.07	14.00	22.00	53.25	29.50	20	1 1/4-7 UNC	SY11...†	150	
F6750HD	30"	73426	28146	6.51	14.00	22.00	57.50	36.00	28	1 1/4-7 UNC	SY12...†	150	

Dimension "A" is compressed, add .125" for relaxed state.

†SY6 and larger available in 110/220 VAC versions only.


AF, AM and GM maximum actuator ambient temperature is 122°F.

SY... maximum actuator ambient temperature is 150°F.


Application Notes

- Valves are rated at 200 psi differential pressure in the closed position (SY... 150 psi 14"+).
- Valves are furnished with lugs tapped for use with ANSI Class 125/150 flanges. Installation flanges and hardware are not included.
- 2-way assemblies are furnished assembled and tested, ready for installation.
- Dimension "D" allows for actuator removal without the need to remove the valve from the pipe.
- Weather shields are available, dimensional data upon request.
- Dual actuated valves have actuators mounted on a common valve shaft.
- Belimo SY Series actuators are NEMA 4X rated.

Flow Pattern



Dimensions

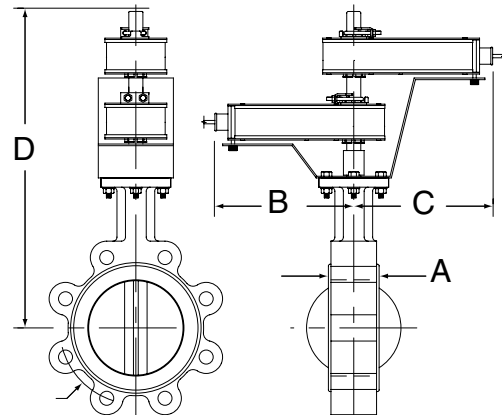

BF2WUDIM

050904 - 02/12 - Subject to change. © Belimo Aircontrols (USA), Inc.

AFBUP(-S)-X1, AFXUP(-S)-X1, AFRBUP(-S), AFRXUP(-S), AFRXUP-S N4 Actuators, On/Off



Models

AFBUP-X1	AFBUP-5
AFBUP-S-X1	AFRXUP
AFXUP-X1	AFRBP-S-5
AFXUP-S-X1	AFRXUP-S
AFRXUP-S N4	

Technical Data


Power supply	24...240 VAC -20% / +10%, 50/60 Hz 24...125 VDC ±10%
Power consumption	running 7 W holding 3.5 W
Transformer sizing	7 VA @ 24 VAC (class 2 power source) 8.5 VA @ 120 VAC 18 VA @ 240 VAC
Electrical connection	3 ft, 18 GA appliance cable, 1/2" conduit connector -S models: Two 3 ft, 18 gauge appliance cables with 1/2" conduit connectors
AFBUP.../ AFRBP...	
AFXUP.../ AFRXUP...	3 ft [1m], 10 ft [3m] or 16 ft [5m] 18 GA appliance cable, with or without 1/2" conduit connector -S models: Two 3 ft [1m], 10 ft [3m] or 16 ft [5m] appliance cables with or without 1/2" conduit connectors
Overload protection	Electronic throughout 0 to 95° rotation
Control	On/Off
Torque	180 in-lb [20 Nm] minimum
Direction of rotation	spring reversible with CW/CCW mounting
Mechanical angle of rotation	95° (adjustable with mechanical end stop, 35° to 95°)
Running time	motor < 75 sec spring 20 sec @ -4°F to 122°F [-20°C to 50°C]; < 60 sec @ -22°F [-30°C]
Position indication	visual indicator, 0° to 95° (0° is full spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Humidity	max. 95% RH non-condensing
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	Nema 2, IP54, Enclosure Type2
Housing material	Zinc coated metal and plastic casing
Agency listings †	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC & 2006/95/EC
Noise level	<50dB(A) motor @ 75 seconds ≤62dB(A) spring return
Servicing	maintenance free
Quality standard	ISO 9001
Weight	4.6 lbs (2.1 kg), 4.9 lbs (2.25 kg) with switches

† Rated Impulse Voltage 4kV, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

AFBUP-S-X1, AFXUP-S-X1, AFRBUP-S-5, AFRXUP-S

Auxiliary switches	2 x SPDT 3A (0.5A) @ 250 VAC, UL Approved one set at +10°, one adjustable 10° to 90°
--------------------	---


Dimensions with 2-Way Valve

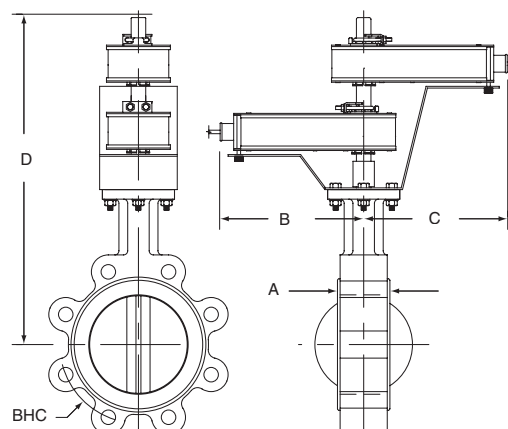

BF2WUDIM_A

Valve	Size	Dimensions (Inches)					Fail Safe (psi)	
		A	B	C	D(Max)	BHC	AF	2*AF
F650HD	2"	1.65	9.00	9.00	19.50	4.75	200	
F650H DU	2"	1.65	9.00	9.00	19.50	4.75	50	
F665HD	2½"	1.76	9.00	9.00	20.00	5.50		200
F665H DU	2½"	1.76	9.00	9.00	20.00	5.50	50	
F680HD	3"	1.78	9.00	9.00	20.50	6.00		200
F680H DU	3"	1.78	9.00	9.00	20.50	6.00		50
F6100H DU	4"	2.05	9.00	9.00	21.00	7.50		50
F6125H DU	5"	2.14	9.00	9.00	22.00	8.50		50
F650-150SHP	2"	1.75	9.00	9.00	19.50	4.75		150
F665-150SHP	2½"	1.88	9.00	9.00	20.00	5.50		150
F680-150SHP	3"	1.92	9.00	9.00	20.50	6.00		150
F6100-150SHP	4"	2.13	9.00	9.00	21.00	7.50		150
F650-300SHP	2"	1.75	9.00	9.00	19.50	5.00		150
F665-300SHP	2½"	1.88	9.00	9.00	20.00	5.88		150
F680-300SHP	3"	1.92	9.00	9.00	20.50	6.63		150
F6100-300SHP	4"	2.13	9.00	9.00	21.00	7.88		150
F650VIC	2"	3.21	9.00	9.00	18.50	-	200	
F665VIC	2½"	3.77	9.00	9.00	19.75	-	50	
F665VIC	2½"	3.77	9.00	9.00	20.50	-		200
F680VIC	3"	3.77	9.00	9.00	20.50	-		50

Dimensions with 3-Way Valve

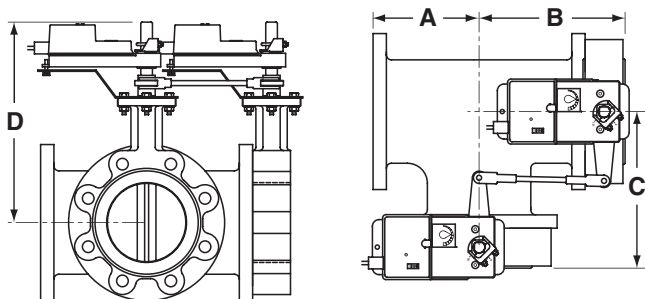

Valve	Size	Dimensions (Inches)					Fail Safe (psi)	
		A	B	C	D(Max)	BHC	AF	2*AF
F750HD	2"	4.50	6.15	6.15	15.50	4.75	200	
F750H DU	2"	4.50	6.15	6.15	15.50	4.75	50	
F765HD	2½"	5.00	6.76	6.76	16.00	5.50		200
F765H DU	2½"	5.00	6.76	6.76	16.00	5.50		50
F780H DU	3"	5.50	7.28	7.28	16.25	6.00		50
F750VIC	2"	4.50	6.85	6.85	15.00	-	50	
F750VIC	2"	4.50	6.85	6.85	15.00	-		200
F765VIC	2½"	5.00	7.46	7.46	15.50	-		50

Typical Specification

On/Off spring return damper actuators shall be direct coupled type which require no crank arm and linkage and be capable of direct mounting to a jackshaft up to a 1.05" diameter. The actuators must be designed so that they may be used for either clockwise or counterclockwise fail-safe operation. Actuators shall be protected from overload at all angles of rotation. If required, two SPDT auxiliary switch shall be provided having the capability of one being adjustable. Actuators with auxiliary switches must be constructed to meet the requirements for Double Insulation so an electrical ground is not required to meet agency listings. Actuators shall be cULus approved and have a 5 year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

Wiring Diagrams

INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**
Actuators may be connected in parallel.
Power consumption and input impedance must be observed.
- 3 No ground connection is required.
- 4 For end position indication, interlock control, fan startup, etc.,
AFBUP-S-X1 and AFXUP-S-X1 incorporates two built-in auxiliary switches:
2 x SPDT, 3A (0.5A) @250 VAC, UL Approved, one switch is fixed at +10°, one is adjustable 10° to 90°.

APPLICATION NOTES

- Meets cULus requirements without the need of an electrical ground connection.

WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

