Factory Set
P2... Series Pressure Independent Characterized Control Valves (PICCV)
Chrome Plated Brass Ball and Brass Stem, NPT Female Ends



Application

The Pressure Independent Characterized Control Valve is typically used in air handling units on heating and cooling coils, and fan coil unit heating or cooling coils. Some other common applications include unit ventilators and VAV re-heat coils. This valve is suitable for use in a hydronic system with constant or variable flow.

This valve is designed with MFT functionality which facilitates the use of various control input.

Technical Data	
Service	chilled or hot water, 60% glycol
Flow characteristic	equal percentage
Size	½", ¾", 1"
Type of end fitting	female, NPT
Materials	
Body	forged brass, nickel plated
Ball	chrome plated brass
Stem	chrome plated brass
Seat O-rings	Viton
Seat	fiberglass reinforced Teflon® PTFE
Characterizing disc	½" & ¾" Brass 1" TEFZEL®
Packing	2 EPDM O-rings, lubricated
Diaphragm	½" & ¾" silicone and Nomex 1" polyester reinforced silicone
Regulator components	stainless steel/brass/Nitrile
Spring	stainless steel
Body pressure rating	600 PSI
Media temp. range	0°F to 212°F [-18°C to +100°C]
Close off pressure	200 PSI
Leakage	ANSI Class IV (0.01% of rated valve capacity at 50 psi differential)
Rangeability	100 : 1
Differential pressure	5 to 50 PSI operating range
Valve accuracy	± 5%*
Weight of valve body	½" = 2.52 lbs ¾" = 2.52 lbs 1" = 4.98 lbs

½" body has three discs with different flow capbilities (.50 GPM to 1 GPM), (1.5 GPM to 2.5 GPM), (3 GPM to 5.5 GPM)
1" body has two discs with different flow capabilities (11 GPM to 16 GPM), (17 GPM to 19 GPM)
Tefzel® and Teflon® are registered trademarks of Dupont™
* See page 3 of the PICCV Technical Documentation for more details.

	Flow Rate		Valve Nominal Size			Suitable Actuators				
Valve Model	GPM	Liter/sec	Inches	DN mm	Close-off PSI	Spring Return		Non-Spring Return		
P2050B005(-P)	0.5	0.03	½	15	200	TFR24-MFT US	LF24-MFT US	LRB(X)24-3	LRX24-MFT	LRCB24-3 Heat Pump Only
P2050B010(-P)	1	0.06	½	15	200					
P2050B015(-P)	1.5	0.09	½	15	200					
P2050B020(-P)	2	0.13	½	15	200					
P2050B025(-P)	2.5	0.16	½	15	200					
P2050B030(-P)	3	0.19	½	15	200					
P2050B035(-P)	3.5	0.22	½	15	200					
P2050B040(-P)	4	0.25	½	15	200					
P2050B045(-P)	4.5	0.28	½	15	200					
P2050B050(-P)	5	0.32	½	15	200					
P2050B055(-P)	5.5	0.35	½	15	200					
P2075B060(-P)	6	0.38	¾	20	200					
P2075B065(-P)	6.5	0.41	¾	20	200					
P2075B070(-P)	7	0.44	¾	20	200					
P2075B075(-P)	7.5	0.47	¾	20	200					
P2075B080(-P)	8	0.50	¾	20	200					
P2075B085(-P)	8.5	0.54	¾	20	200					
P2075B090(-P)	9	0.57	¾	20	200					
P2075B095(-P)	9.5	0.60	¾	20	200					
P2075B100(-P)	10	0.63	¾	20	200					
PICCV-25-011(-P)	11	0.69	1	25	200					
PICCV-25-012(-P)	12	0.76	1	25	200					
PICCV-25-013(-P)	13	0.82	1	25	200					
PICCV-25-014(-P)	14	0.88	1	25	200					
PICCV-25-015(-P)	15	0.95	1	25	200					
PICCV-25-016(-P)	16	1.01	1	25	200					
PICCV-25-017(-P)	17	1.07	1	25	200					
PICCV-25-018(-P)	18	1.14	1	25	200					
PICCV-25-019(-P)	19	1.20	1	25	200					

(-P) optional, ΔP verification across valve using PT ports

P10410 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.




MFT 5 YEAR WARRANTY

Models

LF24-MFT
LF24-MFT-S w/built-in aux. switch


Technical Data		
Control		MFT
Control signal		2 to 10 VDC
Power consumption	running	2.5 W
	holding	1 W
Transformer sizing		5 VA (class 2 power source)
Electrical connection		3 ft., 18 GA appliance cables (-S model has 2 cables) ½" conduit connector
Overload protection		electronic throughout 0° to 95° rotation
Input impedance		100 kΩ for 2 to 10 VDC (0.1 mA) 500 Ω for 4 to 20mA 750 Ω for PWM 500 Ω for on/off and floating point
Feedback		2 to 10 VDC, 0.5 mA max
Angle of rotation		95°
Direction of rotation	spring	reversible with CW/CCW mounting
	motor	reversible with built-in ↷/↶ switch
Position indication		visual indicator
Running time		<40 to 75 seconds (on-off) 100 seconds
	spring	<25 sec. @-4°F to +122°F [-20°C to +50°C] <60 sec. @-22°F [-30°C]
Ambient temperature		-22°F to +122°F [-30°C to +50°C]
Housing		NEMA 2
Agency listings		UL 873, CSA C22.2 No. 24 certified, CE
Noise level		max. 62 dB(A)
Quality standard		ISO 9001
LF24-MFT-S US		
Auxiliary switch		1 x SPDT, 6A (1.5A) @ 250 VAC, UL Listed, adjustable 0° to 95° (double insulated)

Dimensions (Inches [mm])

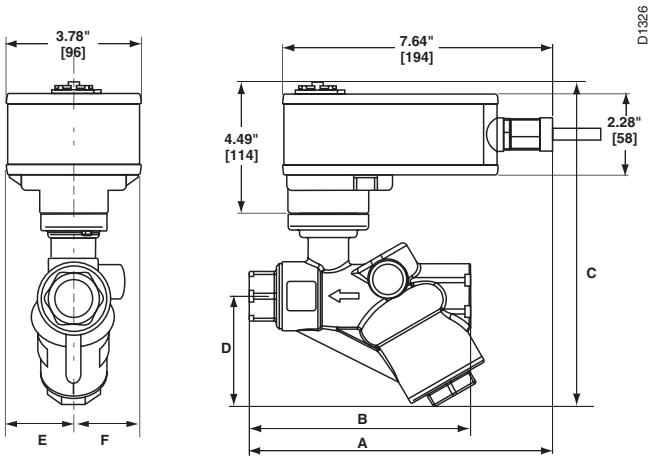

Valve Nominal Size		Dimensions (Inches [mm])					
In.	DN [mm]	A	B	C	D	E	F
½"	15	8.1" [206]	4.47" [114]	8.54" [217]	2.34" [59]	1.89" [48]	1.89" [48]
¾"	20	8.3" [211]	5.4" [137]	8.54" [217]	2.34" [59]	1.89" [48]	1.89" [48]
1"	25	9.1" [231]	6.85"[174]	9.29" [236]	3.23" [82]	1.89" [48]	1.89" [48]


Dimensions with PT Port (Inches [mm])

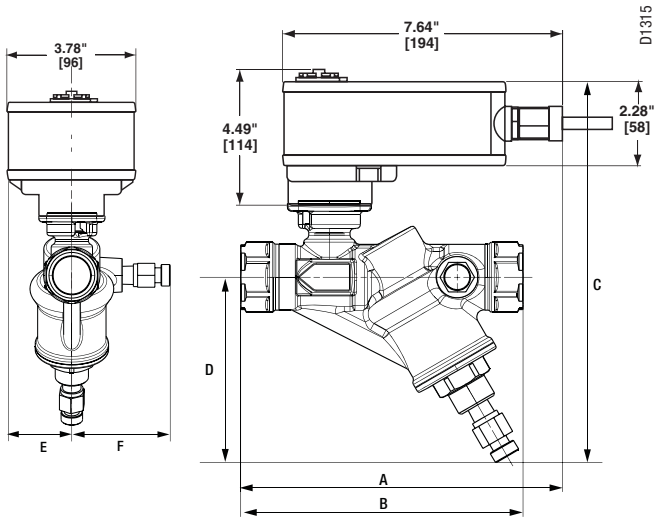

Valve Nominal Size		Dimensions (Inches [mm])					
In.	DN [mm]	A	B	C	D	E	F
½"	15	8.1" [206]	4.47" [114]	9.57" [243]	3.54" [90]	1.89" [48]	2.4" [61]
¾"	20	8.3" [211]	5.4" [137]	9.57" [243]	3.54" [90]	1.89" [48]	2.4" [61]

P10410 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

Dimensions with PT Port (Inches [mm])

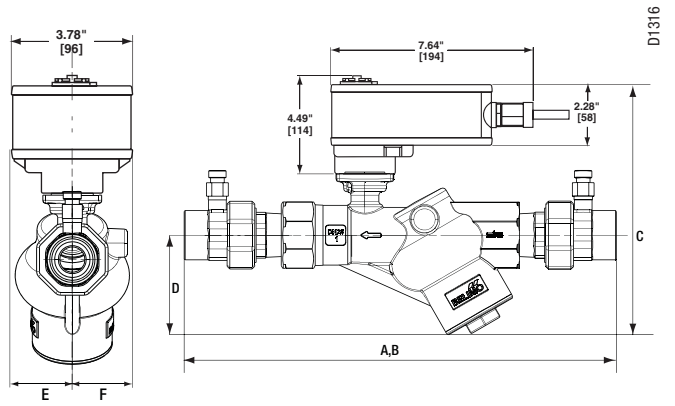

Valve Nominal Size		Dimensions (Inches [mm])					
In.	DN [mm]	A	B	C	D	E	F
1"	25	12.6" [320]	12.6" [320]	9.25" [235]	2.95" [75]	1.89" [48]	1.89" [48]

Wiring Diagrams

INSTALLATION NOTES

2 **CAUTION** *Equipment damage!*
Actuators may be connected in parallel if not mechanically mounted to the same shaft. Power consumption and input impedance must be observed.

3 Actuators may also be powered by 24 VDC.

4 IN4004 or IN4007 diode (IN4007 supplied, Belimo part number 40155).

5 Triac A and B can also be contact closures.


6 Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 VAC line.

7 Position feedback cannot be used with Triac sink controller. The actuators internal common reference is not compatible.


APPLICATION NOTES

The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.


WARNING *Live Electrical Components!*
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

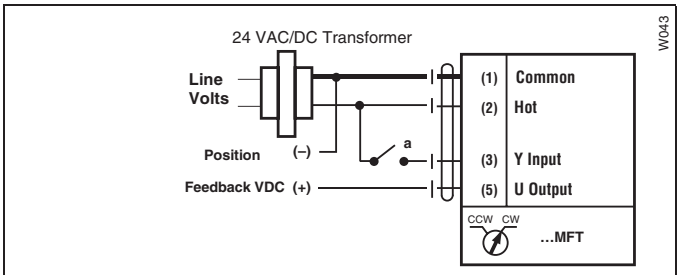


On/Off Control

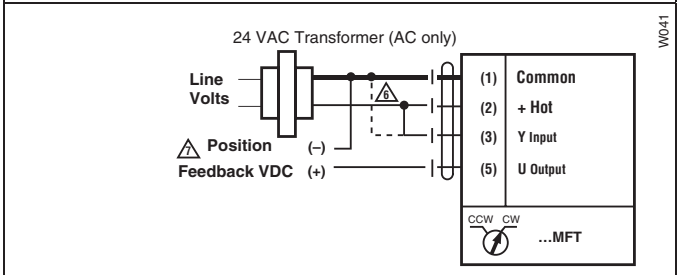

PWM, Triac Source and Sink

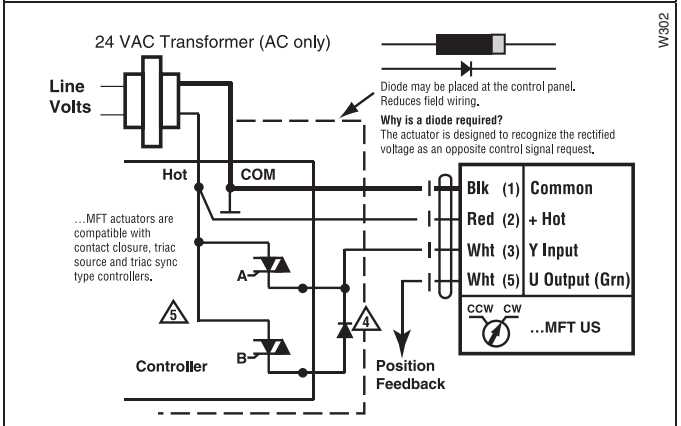

Floating Point Control

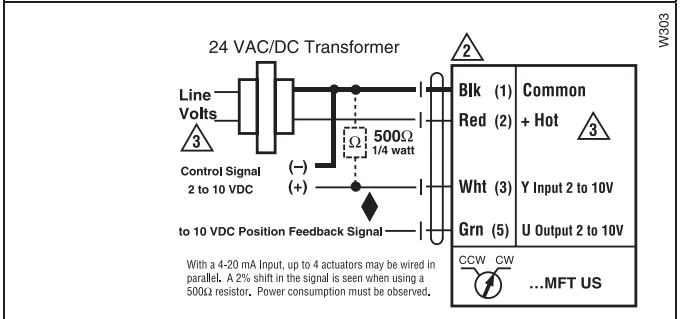

Proportional 2 to 10 or 4 to 20 mA Control Signal

P10410 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.