



Hx21 & Hx21SP Series



H321

Maximize Reliability
Minimize Installed Cost


SPECIFICATIONS

Sensor Power	30 mA (max) @ 12 to 30 Vdc
Insulation Class	600 Vac RMS
Frequency Range	50/60 Hz
Temperature Range	-15 to 60 °C (5 to 140 °F)
Humidity Range	10 to 90% RH, non-condensing
Accuracy	±2% from 10 to 100% of full scale
Response Time	2 sec.
Terminal Block Wire Size	12 AWG (3.3 mm ²)
Terminal Block Torque	7 to 8 in-lbs (0.8 to 0.9 N-m)
Agency Approvals	UL 508 open device listing, CE1: EN61010-1, (H221, H321 only) CAT III, pollution degree 2, basic insulation
Limited Warranty	5 years

1. The CE mark indicates RoHS2 compliance. Please refer to the CE Declaration of Conformity for additional details.

EXAMPLE LINEAR OUTPUT

Scale software as shown

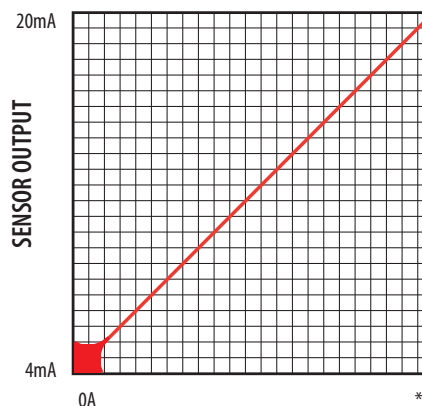

*Adjusted with Span Potentiometer for Hx21 models;
Factory-set per customer specification for Hx21SP models

100 to 300A (H221/H221SP)
300 to 800A (H321/H321SP)
1000 to 2400A (H421/H421SP)

LARGE LOAD TRENDING WITH 4 TO 20 MA OUTPUT

DESCRIPTION

Hawkeye x21/x21SP analog current transducers provide reliable load trending information for large motor loads (up to 2400A), with a proportional 4 to 20 mA signal. Three devices are available, each with a different amperage range. The Hx21 versions include a span potentiometer that allows each sensor to be calibrated for maximum resolution. The Hx21SP versions are factory-calibrated at a range specified by the customer.

APPLICATIONS


- Load trending of large motors and other loads up to 2400 A
- Monitor critical motors (compressor, fuel, etc.)

FEATURES

- Split-core design for easy installation and fast retrofits
- No need for external CTs on large conductors
- Large openings for heavy conductors
- Loop powered 4 to 20 mA output
- Two-wire design reduces wiring cost
- Hx21 models offer zero and span adjustments for field flexibility
- Hx21SP models are factory-set at a range specified by the customer for easy setup and high confidence
- 100% solid state...no moving parts to fail
- 5-year warranty



DIMENSIONAL DRAWINGS

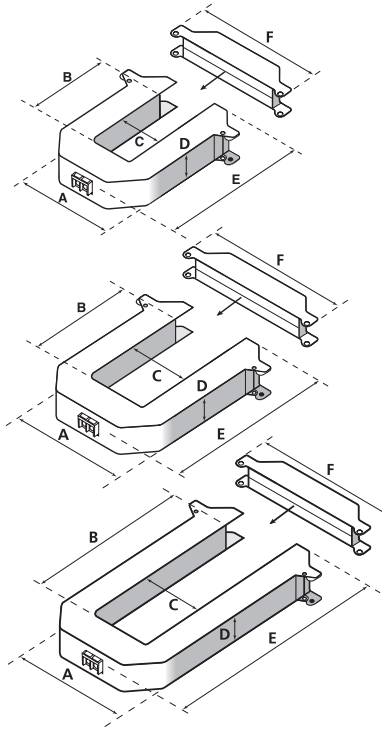

H221

A = 3.7" (94 mm)
B = 1.6" (40 mm)
C = 1.4" (35 mm)
D = 1.1" (29 mm)
E = 4.2" (106 mm)
F = 4.7" (120 mm)

H321


A = 4.9" (124 mm)
B = 2.9" (75 mm)
C = 2.5" (63 mm)
D = 1.2" (29 mm)
E = 5.5" (140 mm)
F = 6.0" (151 mm)

H421


A = 4.9" (124 mm)
B = 5.5" (141 mm)
C = 2.5" (65 mm)
D = 1.1" (29 mm)
E = 8.1" (206 mm)
F = 6.0" (151 mm)

WIRING DIAGRAMS

Monitoring Fan / Pump Motor Loads

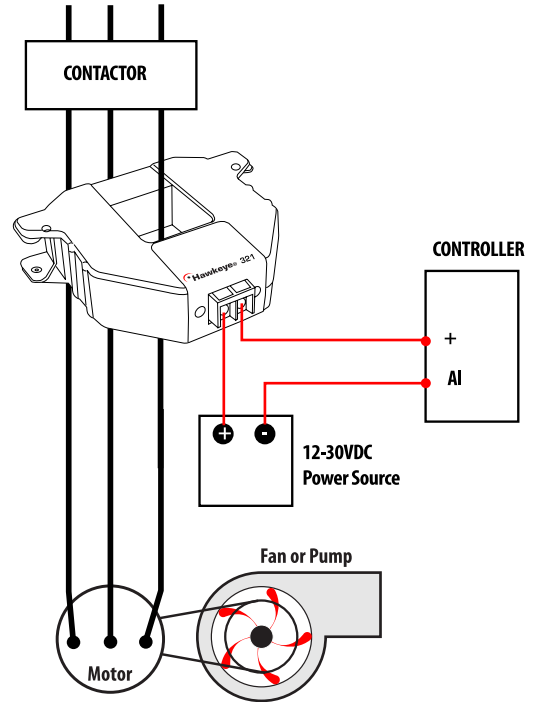

Voltage Output

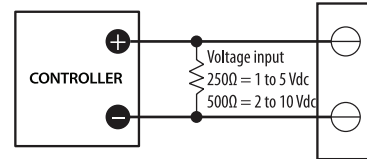

ORDERING INFORMATION



MODEL	AMPERAGE RANGE		SENSOR OUTPUT	HOUSING	UL	CE	LEAD FREE
	4 mA (Lower Limit)	20 mA (Upper Limit)					
H221	0 A	100 to 300 A	4 to 20 mA DC	Split-core	1	•	
H221SP		100, 150, 200, 250, or 300 A2			1	•	
H321		300 to 800 A			1	•	
H321SP		300, 400, 500, 600, 700, or 800 A2			1	•	
H421		1000 to 2400 A					•
H421SP		1000, 1200, 1400, 1600, 1800, 2000, 2200, or 2400 A2					•

1. Listed for use on 75 °C insulated conductors.
2. Factory calibrated - no longer field adjustable
Note: When ordering HxxxSP versions, specify upper current limit for factory calibration (device is not field adjustable).

ACCESSORIES

Universal Power Supply (PS Series)

Universal Mounting Bracket Kit (AH06)



PS



AH06