

## PSC FURNACE BLOWER MOTORS


**SMART ELECTRIC PSC MOTORS:** Designed for use as direct drive furnace blower motors. Choose from three-speed or two-speed, standard efficiency models. All are electrically reversible and include 2 1/4" resilient rings for base mounting. Four (4) split rings included if 2 1/2" diameter required. Bases are sold separately.

### FEATURES:

- 4" length, 1/2" diameter shaft
- 2 1/4" resilient rings, 4 split rings
- All angle sleeve bearings
- Reversible rotation
- 3 speeds
- 5 1/2" diameter
- 1/2" extended thru bolts
- Rheem mounting holes

### SPECIFICATIONS:

- Automatic overload
- Operating temp -4 °F - 104 °F (-20 °C - 60 °C)
- Class B insulation
- 26" leads
- Single phase
- Enclosure—open air-over
- Thermal protection

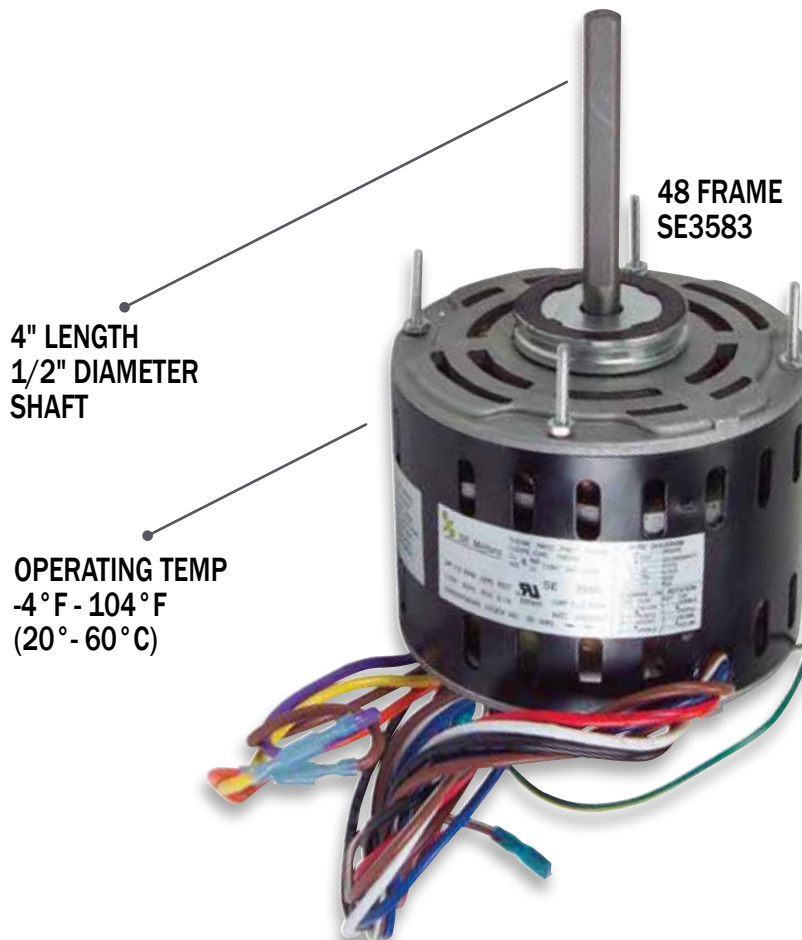

### PSC FURNACE BLOWER MOTORS



| PART NO | HP  | VOLTS    | NET WEIGHT LBS | AMPS | RPM  | SPEED | FRAME | HZ | ROT | MOTOR TYPE | BEARING | CAPACITOR | A  | B     | C    |
|---------|-----|----------|----------------|------|------|-------|-------|----|-----|------------|---------|-----------|----|-------|------|
| SE3583  | 1/4 | 115      | 10.91          | 3.6  | 1075 | 3     | 48    | 60 | REV | OPEN VENT  | SLEEVE  | 5/370     | 4" | 4.89" | 1/2" |
| SE3584  | 1/4 | 208-230V | 10.69          | 1.7  | 1075 | 3     | 48    | 60 | REV | OPEN VENT  | SLEEVE  | 5/370     | 4" | 4.89" | 1/2" |
| SE3585  | 1/3 | 115      | 13.11          | 5.6  | 1075 | 3     | 48    | 60 | REV | OPEN VENT  | SLEEVE  | 5/370     | 4" | 5.14" | 1/2" |
| SE3586  | 1/3 | 208-230V | 12.01          | 2.5  | 1075 | 3     | 48    | 60 | REV | OPEN VENT  | SLEEVE  | 5/370     | 4" | 5.14" | 1/2" |
| SE3587  | 1/2 | 115      | 17.74          | 9.1  | 1075 | 3     | 48    | 60 | REV | OPEN VENT  | SLEEVE  | 5/370     | 4" | 6.14" | 1/2" |
| SE3588  | 1/2 | 208-230V | 17.74          | 4    | 1075 | 3     | 48    | 60 | REV | OPEN VENT  | SLEEVE  | 5/370     | 4" | 5.69" | 1/2" |
| SE3589  | 3/4 | 115      | 17.41          | 10   | 1075 | 3     | 48    | 60 | REV | OPEN VENT  | SLEEVE  | 15/370    | 4" | 6.14" | 1/2" |
| SE3590  | 3/4 | 208-230V | 15.10          | 5    | 1075 | 3     | 48    | 60 | REV | OPEN VENT  | SLEEVE  | 10/370    | 4" | 6.14" | 1/2" |



**ENVIRONMENTALLY SMART**