


MULTI HORSE POWER DIRECT DRIVE FAN & BLOWER MOTORS

FEATURES:

- Reversible rotation
- Continuous air over
- Semi-enclosed construction
- Multi-horse power application
- PSC
- Operating temp:
32°F - 104°F (0°C - 40°C)
- 3 speeds
- 2-1/4" - 2-1/2" res. rings
- Thermal protection

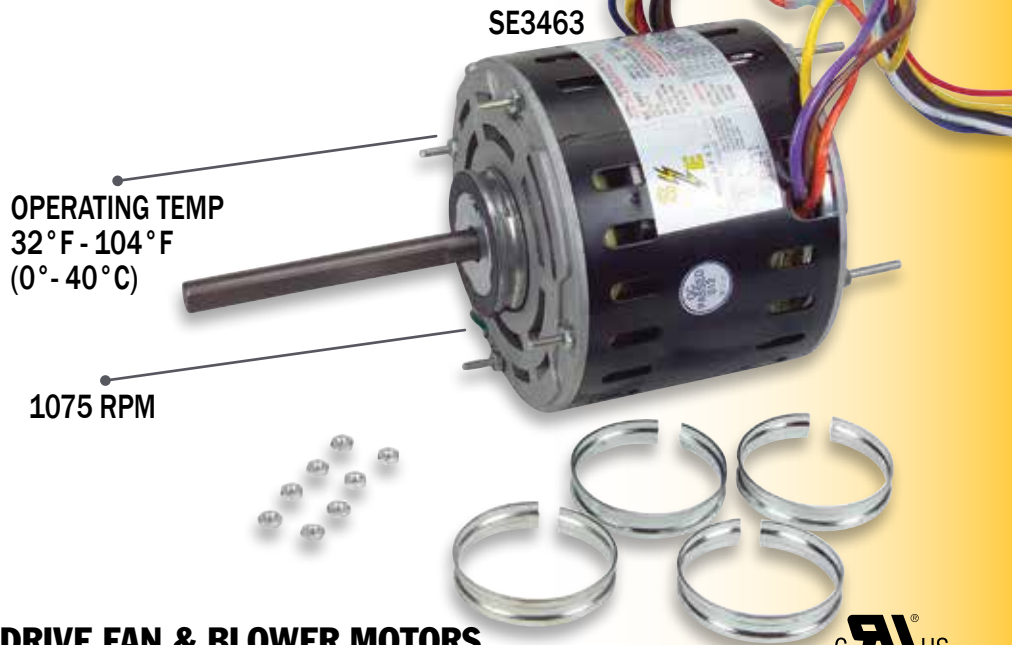

MULTI HORSE POWER DIRECT DRIVE FAN & BLOWER MOTORS

CAL US

PART NO	HP	VOLTS	NET WEIGHT LBS	SPEED	CAP @ 280V	RPM	AMPS	ROT	MOTOR TYPE	BEARING	A	B	C
SE3463	1/2	115v	13.55	ALL	10 MFD	1075	7	REV	OPEN VENT	SLEEVE	4.86"	5"	1/2"
	1/3			HIGH	5 MFD/7.5		6.7						
	1/4			L, ML, MH	5 MFD/7.5		4.4						
	1/5			L, ML	5 MFD/7.5		3.2						
	1/6			LOW	5 MFD/7.5		2.4						
SE3464	1/2	208-230v	13.11	ALL	10 MFD	1075	3.9	REV	OPEN VENT	SLEEVE	4.86"	5"	1/2"
	1/3			ALL	5 MFD/7.5		3.6						
	1/4			L, ML, MH	5 MFD/7.5		2.5						
	1/5			L, ML	5 MFD/7.5		1.8						
	1/6			LOW	5 MFD/7.5		1.3						
SE3466	3/4	115v	15.34	ALL	10 MFD	1075	9.1	REV	OPEN VENT	BALL	4.86"	5"	1/2"
	1/2			ALL	10 MFD		6.8						
	1/3			ALL	5 MFD/7.5		5.5						
	1/4			L, ML, MH	5 MFD/7.5		3						
	1/5			L, ML	5 MFD/7.5		2.3						
SE3467	3/4	208-230v	14.99	ALL	10 MFD	1075	3.9	REV	OPEN VENT	SLEEVE	4.86"	5"	1/2"
	1/2			ALL	10 MFD		3.6						
	1/3			ALL	5 MFD/7.5		3						
	1/4			L, ML, MH	5 MFD/7.5		2.3						
	1/5			L, ML	5 MFD/7.5		2						