

## For Residential and Commercial Applications

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Approval \_\_\_\_\_

Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

# LEAD FREE\*

## Series LF26A, LF263A

### Small Pressure Regulators

**Sizes: LF26A: 1/8" – 1/2" (3 – 15mm)**  
**LF263A: 1/4" – 1/2" (8 – 15mm)**

Series LF26A, LF263A Small Pressure Regulators are general purpose pressure regulators for water service. The LF26A, LF263A features Lead Free\* construction to comply with Lead Free\* installation requirements. These regulators are ideal for use in beverage dispensers, ice cube machines and other similar applications. Lead Free\* small pressure regulators shall comply with state codes and standards, where applicable, requiring reduced lead content.

#### Features

- Rugged forged Lead Free\* Brass body
- Tee handle adjustment
- Oversized orifice

#### Models

**LF26A** 2-way regulator  
**LF263A** 3-way regulator

#### Materials

Body: Lead Free\* Brass  
 Spring Cage: Aluminum  
 Disc: Buna-N stainless steel  
 Diaphragm: Reinforced Buna-N

#### Pressure – Temperature

Temperature Range: 0°F – 140°F (-18°C – 60°C)  
 Maximum Working Pressure: 300psi (21 bar)  
 Reduced Pressure Range:

Suffix	Range		Std. Set at	
	psi	bars	psi	bars
A	1 – 25	0.1 – 1.7	10	0.7
B	3 – 50	0.2 – 3.4	15	1.0
C	10 – 125	0.7 – 8.6	25	1.7
D	50 – 175	3.4 – 12.1	50	3.4

#### Options

- G Pressure gauge  
 SS All stainless steel construction  
 X Slotted adjusting screw

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.




**LF26A**  
2-Way




**LF263A**  
3-Way

#### Capacity

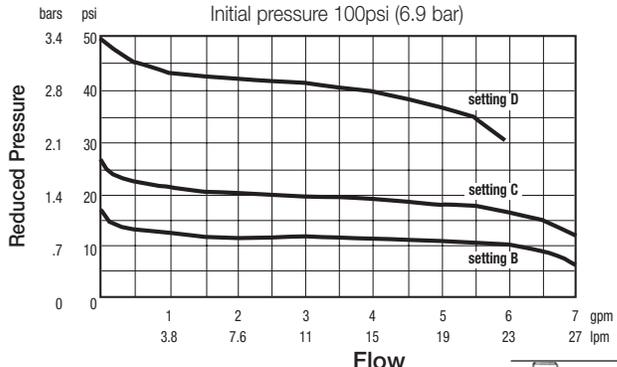

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

#### Approvals



#### Dimensions – Weights

Model	Size (DN)		A		C		Weight	
	in.	mm	in.	mm	in.	mm	lbs	kgs
LF26A	1/8	3	2 1/8	54	4 3/8	111	1	.45
LF26A/LF263A	1/4	8	2 1/8	54	4 3/8	111	1	.45
LF26A/LF263A	3/8	10	2 1/8	54	4 3/8	111	1	.45
LF26A/LF263A	1/2	15	2 1/8	54	4 3/8	111	1	.45



A Watts Water Technologies Company

**USA:** Tel: (978) 689-6066 • Fax: (978) 975-8350 • Watts.com  
**Canada:** Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca  
**Latin America:** Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com