ENGINEERING TOMORROW



Datasheets

Danfoss scroll compressors **H series**




Datasheet, technical data

Danfoss scroll compressor, HLP068T4

General Characteristics

Model number (on compressor nameplate)	HLP068T4LC6	
Code number for Singlepack*	120U2014	
Code number for Industrial pack**	120U2011	
Drawing number	0XR6089B-1	
Suction and discharge connections	Brazed	
Suction connection	7/8 " ODF	
Discharge connection	1/2 " ODF	
Oil sight glass	None	
Oil equalization connection	None	
Oil drain connection	None	
LP gauge port	None	
IPR valve	Yes	
Swept volume	5.68 in3/rev	
Displacement @ Nominal speed	572 cfh @ 2900 rpm - 690 cfh @ 3500 rpm	
Net weight	82 lbs	
Oil charge	53 oz, PVE	
Maximum system test pressure Low Side / High side	- psi / - psi	
Maximum differential test pressure	- psi	
Maximum number of starts per hour	-	
Refrigerant charge limit	12 lbs	
Approved refrigerants	R407C	

Dimensions




Electrical Characteristics

Nominal voltage	380-415V/3/50Hz - 460V/3/60Hz	
Voltage range	342-457 V @ 50Hz - 414-506 V @ 60Hz	
Winding resistance between phases 1-2 +/- 7% at 77°F	1.852 Ω	
Winding resistance between phases 1-3 +/- 7% at 77°F	1.827 Ω	
Winding resistance between phases 2-3 +/- 7% at 77°F	1.867 Ω	
Rated Load Amps (RLA)	9.6 A	
Maximum Continuous Current (MCC)	15 A	
Locked Rotor Amps (LRA)	82 A	
Motor protection	Internal overload protector	

D=7.2 inch, H=17.9 inch, H1=11 inch, H2=16.6 inch, H3=- inch

Terminal box



Recommended Installation torques

Oil sight glass	39 ft.lbs
Power connections / Earth connection	2 ft.lbs / 1 ft.lbs

Parts shipped with compressor

Mounting kit with grommets and sleeves
Initial oil charge
Installation instructions

Approvals: CE certified, UL certified (file SA11565), -

*Singlepack: Compressor in cardboard box

**Industrial pack: 12 or 16 Unboxed compressors on pallet

IP22

- 1: Screw connectors 10-32 UNF x 9.5
- 2: Earth connection
- 3: Power cable passage




Datasheet, accessories and spare parts

Danfoss scroll compressor, HLP068T4


Rotolock accessories, suction side	Code no.
Rotolock valve, V05 (1-1/4" Rotolock, 7/8" ODF)	8168030
Gasket, 1-1/4"	8156131
Rotolock accessories, discharge side	Code no.
Solder sleeve, P06 (1" Rotolock, 1/2" ODF)	8153007
Angle adapter, C06 (1" Rotolock, 1/2" ODF)	8168007
Rotolock valve, V06 (1" Rotolock, 1/2" ODF)	8168031
Gasket, 1"	8156130
Rotolock accessories, sets	Code no.
Solder sleeve adapter set (1-1/4"~7/8"), (1"~1/2")	120Z0127
Gasket set, 1", 1-1/4", 1-3/4", OSG gaskets black & white	8156009
Oil / lubricants	Code no.
PVE lubricant, 320HV (FVC68D), 1 litre can	120Z5034
Crankcase heaters	Code no.
Belt type crankcase heater, 50 W, 230 V, CE mark, UL	120Z0057
Belt type crankcase heater, 50 W, 400 V, CE mark, UL	120Z0058
Miscellaneous accessories	Code no.
Acoustic hood	120Z5044
Discharge thermostat kit	7750009
Spare parts	Code no.
Mounting kit for 1 scroll compressor including 4 grommets, 4 sleeves, 4 bolts, 4 washers	120Z5005
Mounting kit for 1 scroll compressor including 4 grommets, 4 sleeves, 4 bolts, 4 washers	120Z5031

Solder sleeve adapter set



- 1: Rotolock adapter (Suc & Dis)
- 2: Gasket (Suc & Dis)
- 3: Solder sleeve (Suc & Dis)
- 4: Rotolock nut (Suc & Dis)



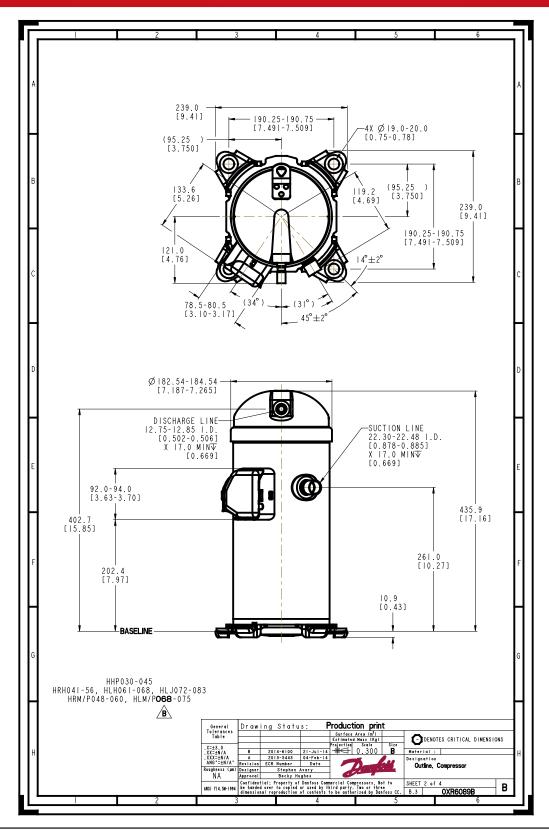

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.

FRCC.PD.0XR6089Bb page drawings