



Bell & Gossett

a xylem brand

SUBMITTAL

A-430H

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



Lead Free* Reducing Valves Valves and Fittings



DESCRIPTION

B & G reducing valves protect heating and plumbing systems against excessive line pressures. They are factory set at specified limits although adjustment is easily made. Equipped with built-in-strainer and low inlet pressure check valve. Tail piece for union models is combination - 1/2" cooper sweat and 1/2" male NPT.

CONSTRUCTION

Wetted Parts: BODY, cast lead free brass*; DIAPHRAGM, EPT with special insert; CHECK VALVE, EPDM; SEAT, lead free brass*; STEM, lead free brass* with EPDM insert; VALVE PLATE, STRAINER AND STRAINER NUT, lead free brass*.

Non-Wetted Parts: steel.

*contains less than .25% lead by weight on wetted surfaces


SIZES & PERFORMANCE

MODEL NUMBER	PART NUMBER	SIZE INCHES	FACTORY SETTING PSIG	ADJUSTABLE RANGE PSIG LBS(Kg)	TAGGING INFORMATION	QUANTITY
B-38	110190LF	1/2 NPT	12	10-25		
B7-12	110196LF	3/4 NPT	12	10-25		
B-38TU	110191LF	1/2 UNION NPT/SWEAT	12	10-25		
FB-38*	110192LF	1/2 NPT	12	10-25		
FB-38TU*	110193LF	1/2 UNION NPT/SWEAT	12	10-25		
6	110194LF	1/2 NPT	45	25-60		
7	110195LF	3/4 NPT	45	25-60		

MAXIMUM FLOW 5-1/2 - 6 GPM AT 125 PSIG INLET PRESSURE.

*FAST FILL MODELS

MAXIMUM OPERATING TEMPERATURE 225°F(107°C) - MAXIMUM WORKING PRESSURE 125 PSIG (862 kPa)

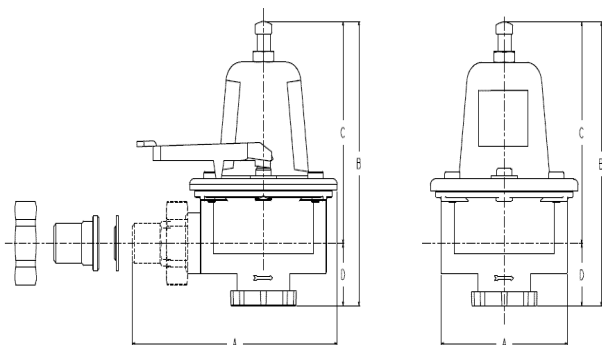

MODEL NUMBER	DIMENSIONS - INCHES (mm)				APPROX. SHIPPING WT. LBS. (kg)
	A	B	C	D	
B-38	3-1/16 (77.8)	4-7/8 (123.8)	3-3/4 (95.3)	1-1/8 (28.6)	1-3/4 (0.8)
B7-12	3 (76.2)	5-1/32 (127.8)	3-23/32 (94.5)	1-5/16 (33.3)	2-1/4 (1.0)
B-38TU	4-31/32(126.2)	4-7/8 (123.8)	3-3/4 (95.3)	1-1/8 (28.6)	2 (0.9)
FB-38	3-1/16 (77.8)	4-7/8 (123.8)	3-3/4 (95.3)	1-1/8 (28.6)	1-3/4 (0.8)
FB-38TU	3-1/16 (77.8)	4-7/8 (123.8)	3-3/4 (95.3)	1-1/8 (28.6)	2 (0.9)
6	3-1/16 (77.8)	4-7/8 (123.8)	3-3/4 (95.3)	1-1/8 (28.6)	1-3/4 (0.8)
7	3 (76.2)	5-1/32 (127.8)	3-23/32 (94.5)	1-5/16 (33.3)	2-1/4 (1.0)

TYPICAL SPECIFICATIONS

Furnish and install as shown on plans, a diaphragm operated Pressure Reducing Valve with brass body, low inlet pressure check valve and inlet strainer. The strainer must be easily removed without system shutdown.

The valve seat, strainer and stem must be removable and of non-corrosive material.

Xylem Bell & Gossett, No. _____, Set @ _____ lbs.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.