



GT-Lite

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK
TURN OFF OR DISCONNECT FROM POWER
WHILE INSTALLING OR SERVICING UNIT

GT-WL-50-U | GT-Lite 5,000 Lumen LED Portable Work Light

WARNING



- When using product, basic precautions should always be followed.
- Read and follow these instructions and observe all warnings.
- Carefully read and understand the information given in this manual before beginning installation. Failure to do so could lead to electric shock, fire, or other injuries which could be hazardous or even fatal.
- Save these instructions and warnings.

CAUTION




- This item is IP54 rated against dust and brief sprays of water. Never submerge this product in water! Do not use with extension cord near water or where water may accumulate. Keep work light at least 16' from pools and spas. Keep plugs and receptacles dry.
- Do not use on hot surfaces.
- Do not remove the lens protecting the LED.
- It is not possible to change the LED light source.
- This is not a vapor proof light.
- Do not dismantle this light. The LED chips are not replaceable.
- This work light is not a toy and is not suitable for use by children.


WORK LIGHT CONSTRUCTION:

- A. Carrying handle with comfort grip
- B. Lightweight, scratch-resistant frame
- C. Tilting light face
- D. LEDs
- E. Impact resistant lens cover
- F. Base Knob
- G. H-Stand
- H. Side Star Knobs (2)
- I. U-Frame
- J. On/Off switch
- K. USB charger (2.0A USB charging port)
- L. Tangle-free grounded Power Cord

Front View

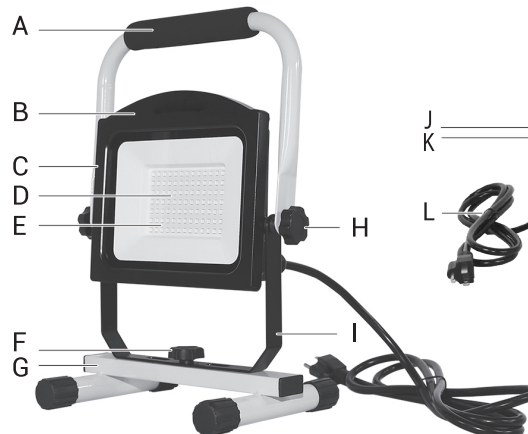

Back View

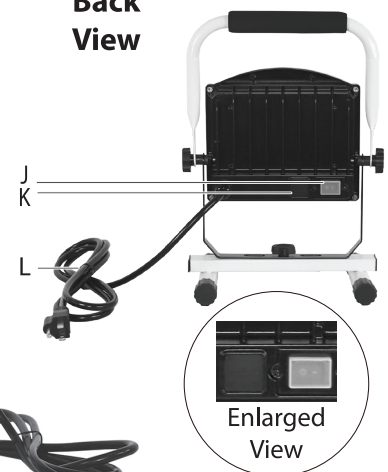



GT-Lite

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK
TURN OFF OR DISCONNECT FROM POWER
WHILE INSTALLING OR SERVICING UNIT

GT-WL-50-U | GT-Lite 5,000 Lumen LED Portable Work Light

ASSEMBLY:

Attach U-Frame (I) to H-Stand (G) by screwing Base Knob (F) completely through the holes on U-Frame (I) and H-Stand (G) until tight.



TO USE:

1. Plug Power Cord (L) into outlet. Press the On/Off switch (J) on the back of the unit to turn the light on and off.
2. Slightly loosen Side Star Knobs (H). Tilt and adjust angle for best light then lightly tighten (both star knobs need to be loosened and tightened simultaneously).
3. Slightly loosen Base Knob (F). Swivel the U-Frame (I) left and right until desired angle is achieved, then lightly tighten.

EYES



- Do not look directly at the LED lights for any length of time.
- Do not remove protective lens covering LED lights.



GT-Lite Limited Warranty: This product is guaranteed against failure due to factory defects in material and workmanship for 1 year from the date of purchase. Warranty is non-transferable and applies only to original owner. Warranty does not cover normal wear and tear of parts, or damage resulting from misuse of product (i.e., using in extreme weather, alterations made to product, neglect, or abuse). Keep your proof of purchase. All warranty claims need original receipts to be processed. Shipping and handling fee may apply to replacement items.

Questions or Comments? Customer Service 1-800-865-6799 or info@gt-ind.com

