




COOK

CBF

Transfer Fan
Thru Wall Mounting
Direct Drive

STANDARD CONSTRUCTION FEATURES:
Corrosion resistant galvanized steel housing -
Tinnerman clips for grille mounting - Junction box for
easy wiring - Mounting flanges - Powder coated steel
grille - Easily removable internal assembly.

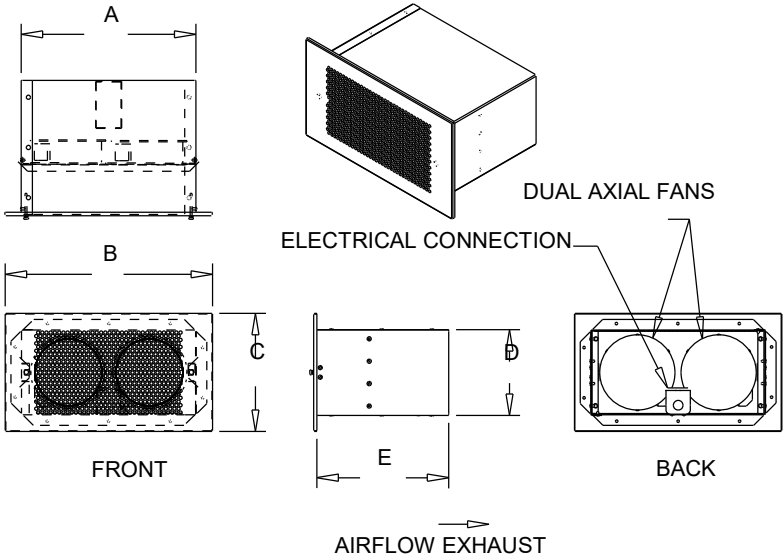

Performance

Qty	Catalog Number	Fan RPM	Input Watts	FEG
1	CBF	3400	82	n/a(<1HP)

Motor Information

RPM	Volts/Ph/Hz	Nameplate Amps
3400	115/1/60	.7

Accessories:

FAN SPEED CONTROLLER 5 AMP 120 VOLT


Dimensions (inches)

A	15-5/8
B	18-9/16
C	10-9/16
D	7-11/16
E	11-13/16

NOTE: Accessories may affect dimensions shown.

Weight(lbs)***	Shipping	31	Unit	22
----------------	----------	----	------	----

***Includes fan, motor & accessories.

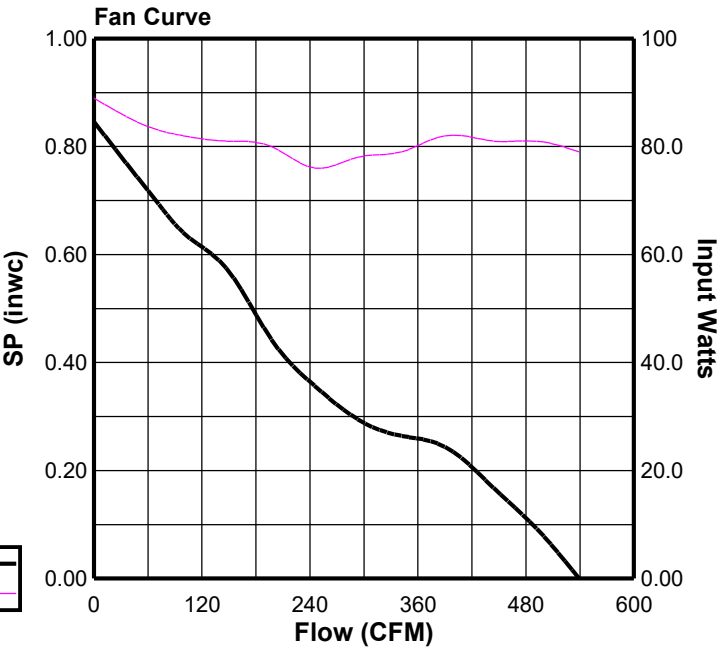



FSC

Fan Speed Controls

STANDARD CONSTRUCTION FEATURES:

PRODUCT DESCRIPTION - Through the "Quadrac" integrated semi-conductor device it is now possible to offer this system with many advantages. Fewer semi-conductor parts mean greater reliability and the passivation process used in the manufacture of the semi-conductor insures long life.

Printed circuit construction eliminates wiring difficulties and guarantees workmanship.

All of these factors serve to offer the most important of all features - quality.

SPEED CONTROL - Positive Off/On action in the control dial. Speed range set to the customer's requirements. **CONTROL RATING** - 120 volts, 60 cycles, 1 phase. Maximum ambient temperature - 120 degree F (5 AMP, 10 AMP, 15 AMP). 220/240 volt, 50/60 cycles, 1 phase. Maximum ambient temperature - 120 degree F (5 AMP, 10 AMP). 220/240 volt model not UL listed. Fan cannot have UL listing if furnished with prewired 220/240 volt FSC. 277 volt, 60 cycles, 1 phase.

Maximum ambient temperature - 120 degree F (5 AMP). **WARNING** - Power must be turned off before installing this unit. **STANDARD INSTALLATION** - Fits any standard single gang box.

Turn off power and connect the two wires on the control to the two switch wires in the usual manner. The connection box is not supplied. **SPECIAL FEATURES** - Complete range control, solid state "Quadrac" integrated circuitry, solid state construction for long reliable operating life, saves on electric bills.

Dimensions (inches)

Mark	Qty	Description
EF-1	1	FSC 5 AMP 120 VOLT

