



ASPEN® MINI-SPLIT PUMP KITS

Continued

Aqua Series



Ultra-slim profile, fits inside evaporator or lineset cover

Code	Universal Voltage Kits	Power Supply	Power Consumption	Ctn. Wt.	Qty.
83809	(ASP-MA-UNI)	100-250 VAC	.2A 16W	2lbs	1
	Silent Plus Kits				
83812	(ASP-MA-230-SP)	250 VAC	.1A 16W	2lbs	1

FEATURES

- Ultra-slim profile
- Self Priming
- Integral hanging loop and separate reservoir facilitates attachment in vertical applications
- 3A NC dry contacts rated @ 5A inductive at 230V AC
- Modular terminals for fast connection
- Fully potted electronics*

SPECIFICATIONS

Duty Cycle:
50% duty cycle
5 mins on / 5 mins off

Capacity:
Up to 49,500 BTU/hr. @ 230v
Up to 54,600 BTU/hr. @ 115v
3.2 GPH @ zero head,
1.6 GPH @ 33ft head

Maximum head: 33ft


Suction lift: 5ft

Sound level:
Univolt - 21dB(A)
Silent Plus - 19dB(A)

Pump Dimensions:
L-6½" x H-1½" x W-1½"

Class: II Appliance

TYPICAL PUMP LOCATIONS

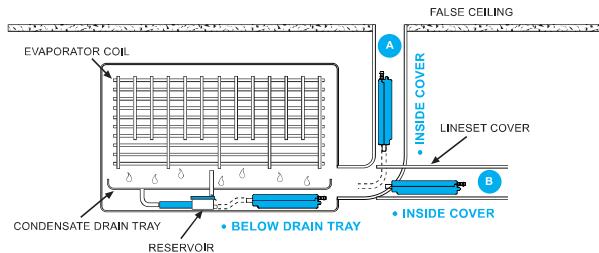

Aspen pre-filter available - see page 79

*Potting is the process of epoxy filling a complete assembly for resistance to shock, vibration, moisture, chemical and promotes sound dampening.
ASPEN® is a registered trademark of Aspen Oldco Limited Company UK