

# ASPEN® MINI-SPLIT PUMP KITS

Continued

## Lime Series

Elbow design, completely reversible, duct included




### Pump Dimensions:

Mini: H-3 $\frac{1}{8}$ " x W-3 $\frac{3}{4}$ " x D-1 $\frac{5}{8}$ "  
 Maxi: H-3 $\frac{3}{8}$ " x W-3 $\frac{3}{4}$ " x D-1 $\frac{5}{8}$ "

### Lineset Casing Dimensions:

Mini/Maxi Elbow Casing:  
 H-5 $\frac{1}{4}$ " x W-5 $\frac{1}{4}$ " x D-2 $\frac{3}{4}$ "  
 Mini/Maxi Duct Casing:  
 H-31" x W-5 $\frac{1}{4}$ " x D-2 $\frac{3}{4}$ "

### TYPICAL PUMP LOCATIONS

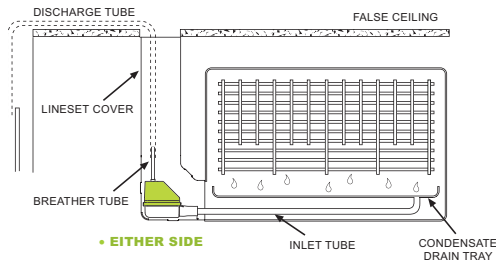

Code	Universal Voltage Mini Kits	Power Supply	Power Consumption	Ctn. Wt.	Qty.
83849	(ASP-ML-UNI) Slimline Ivory	100-230 VAC	.16A 16W	4 lbs	1
83859	(ASP-MLF-UNI) Fortress White	100-230 VAC	.16A 16W	4 lbs	1
Silent Plus Mini Kits					
83852	(ASP-ML-230-SP) Slimline Ivory	230 VAC	.10A 15W	4 lbs	1
Maxi Kits					
83831	(ASP-MAXLF-230) Fortress White	230 VAC	.10A 15W	4 lbs	1
OEM Maxi Kits					
83835	(ASP-MAXOEM-230) No Duct	230 VAC	.10A 15W	2 lbs	1
Code	OEM Mini Kits	Power Supply	Power Consumption	Ctn. Wt.	Qty.
83869	(ASP-MLOEM-UNI) No Duct	100-230 VAC	.16A 16W	2 lbs	1

### FEATURES

- Left or right install
- Easily accessed for filter cleaning
- Two lineset cover styles available - Slimline or Fortress
- 3A NC dry contacts rated @ 5A inductive at 230V AC
- Fully potted electronics\*

### SPECIFICATIONS

#### Duty Cycle:

Mini - non-continuous  
 Maxi - 66% 10 mins on / 5 mins off

#### Capacity:

Mini - Up to 54,600 BTU/hr.  
 2.9-3.2 GPH @ zero head,  
 1.3-1.5 GPH @ 33ft head  
 Maxi - Up to 157,000 BTU/hr.  
 9.0 GPH @ zero head,  
 2.9 GPH @ 49 head

#### Maximum head:

Mini - 33ft Maxi - 49ft

#### Sound level:

Mini - 25.5dB(A)  
 Maxi - 35dB(A)  
 Silent Plus - 21dB(A)

#### Class: II Appliance



Aspen pre-filter available - see page 79

US Patent #6,817,194

\*Potting is the process of epoxy filling a complete assembly for resistance to shock, vibration, moisture, chemical and promotes sound dampening.

ASPEN® is a registered trademark of Aspen Oldco Limited Company UK