INFINITE SWITCHES

$5500\, \mathsf{INFINITE}\, \mathsf{CONTROLS}\, \mathsf{UNI-KITS}^*$

5500 Infinite Uni-Kits include adaptors for screw or palnut type mounting. Kits include dial adaptors to allow the customer's dial to be used. Kits are available with white dials, black dials or no dial. See ordering chart for specific model number. All kits have a dial shaft with easy break-off grooves which can be taken off to match various shaft lengths. 120, 208 and 240 VAC models are available (see ordering chart).

ELECTRICAL RATING

15 amp at 120 VAC, 208 VAC and 240 VAC resistive load.

AMBIENT RATING


Not recommended to exceed 180°F.

CONTROL MECHANISM

3 indexing positions

High, Low, Off


Models are available with a low input of 5% or 22% and infinite inputs up to 100%

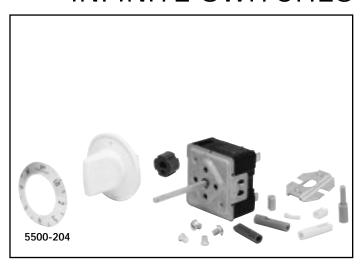

ORDERIN	ig data												
UNI-LINE ORDER NO.	FACTORY PART NUMBER	VOLTAGE	% INPUT AT LOW	DIAL INCLUDED	DAIL SHAFT TYPE	DIAL SHAFT LENGTH	MOUNTING TYPE	COMMENTS					
STANDARD UNI-KITS®													
5500-102				NONE									
5500-103	INF-120-599	120 VAC	5%	BLACK									
5500-104				WHITE									
5500-113	INF-120-599B		22-1/2%	BLACK									
5500-202				NONE	Α	1-13/16"	UNIVERSAL						
5500-203	INF-240-597	240 VAC	5%	BLACK		BREAK-OFF	UNIVERSAL						
5500-204			370	WHITE									
5500-208	INF-208-642	208 VAC		BLACK									
5500-213	INF-240-597B	240 VAC	22-1/2%	BLACK									
5500-225	INF-240-777	240 VAC	5%	NONE				REVERSE ROTATION					
PUSH-TO-TU	RN UNI-KITS®												
5500-105				NONE									
5500-106	INF-120PX-820	120 VAC		WHITE									
5500-107]			BLACK		1 15/1/"		PUSH-TO-TURN					
5500-200			5%	NONE	А	1-15/16" BREAK-OFF	UNIVERSAL	UNI-KITS					
5500-206	INF-240PX-803	240.1/4.0		WHITE		DIVLAK-OFF							
5500-207]	240 VAC		BLACK									
5500-299	INF-240PX-1217			NONE				REVERSE ROTATION					

COMMERCIAL UNI-KITS®

The 5500 Series Commercial Infinite Control kit is the same as the standard infinite kit, except it has a heavy-duty dial shaft. This shaft is grooved at all the standard lengths and may be "broken off" to the required length.

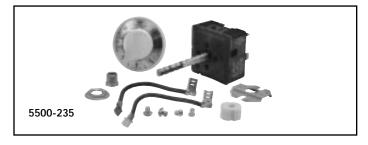

ORDERING DATA											
UNI-LINE ORDER NO.	FACTORY NUMBER	VOLTAGE	% INPUT AT LOW	DIAL INCLUDED	SHAFT TYPE	SHAFT LENGTH	MOUNTING TYPE				
5500-133	INF-120-1152	120 VAC	5%	CHROME	D	2-1/8"	UNIVERSAL				
5500-134				BLACK							
5500-135				WHITE							
5500-136				NONE							
5500-234	INF-240-1153	240 VAC		BLACK							
5500-235				WHITE							
5500-236				NONE							