


CAPACITORS



Super Smart Run Capacitors™

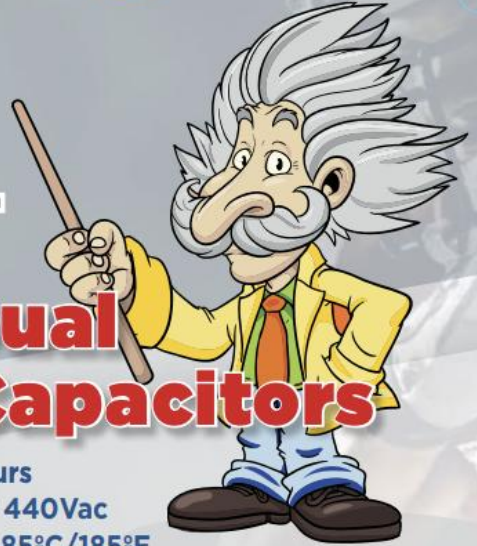

NEW Dual Voltage Capacitors



- Expected Life 60,000 Hours
- Rated Voltage: 370Vac or 440Vac
- Max. permit temperature: 85°C/185°F
- Terminal material, ignition time not to exceed 10 seconds
- UL 810, IEC 60252-1, EIA456-A

- Non-PCB capacitors
- The widest selections of ratings
- Individually boxed
- Medium: Polypropylene Film
- Electrode: Metalized Film
- Aluminum case, metal cap (in accordance with UL)
- Filling material: Plant oil (in accordance with UL)

CAPACITORS RUN 370V-440V - DUAL ROUND

| PART NO. | DESCRIPTION | MASTER BOX |
|-----------|--------------|------------|
| SE540DV | 5 µF mfd. | 50 |
| SE640DV | 6 µF mfd. | 50 |
| SE7540DV | 7.5 µF mfd. | 50 |
| SE1037DV | 10 µF mfd. | 50 |
| SE12540DV | 12.5 µF mfd. | 50 |
| SE1537DV | 15 µF mfd. | 50 |
| SE2040DV | 20 µF mfd. | 50 |
| SE2540DV | 25 µF mfd. | 50 |
| SE3040DV | 30 µF mfd. | 50 |
| SE3540DV | 35 µF mfd. | 50 |
| SE4040DV | 40 µF mfd. | 50 |
| SE4540DV | 45 µF mfd. | 50 |
| SE5040DV | 50 µF mfd. | 50 |
| SE5540DV | 55 µF mfd. | 50 |
| SE6040DV | 60 µF mfd. | 50 |
| SE7040DV | 70 µF mfd. | 50 |
| SE8040DV | 80 µF mfd. | 50 |

DUAL CAPACITORS RUN 370V-440V - ROUND



| PART NO. | DESCRIPTION | MASTER BOX |
|----------|----------------|------------|
| SE44DV | 30+3 µF mfd. | 50 |
| SE88DV | 30+5 µF mfd. | 50 |
| SE46DV | 30+7.5 µF mfd. | 50 |
| SE90DV | 35+5 µF mfd. | 50 |
| SE91DV | 35+7.5 µF mfd. | 50 |
| SE93DV | 40+5 µF mfd. | 50 |
| SE711DV | 40+5 µF mfd. | 50 |
| SE95DV | 45+5 µF mfd. | 50 |
| SE97DV | 50+5 µF mfd. | 50 |
| SE99DV | 55+5 µF mfd. | 50 |
| SE54DV | 55+5 µF mfd. | 50 |
| SE553DV | 60+5 µF mfd. | 50 |