


# Model R & C Shut-off Valves

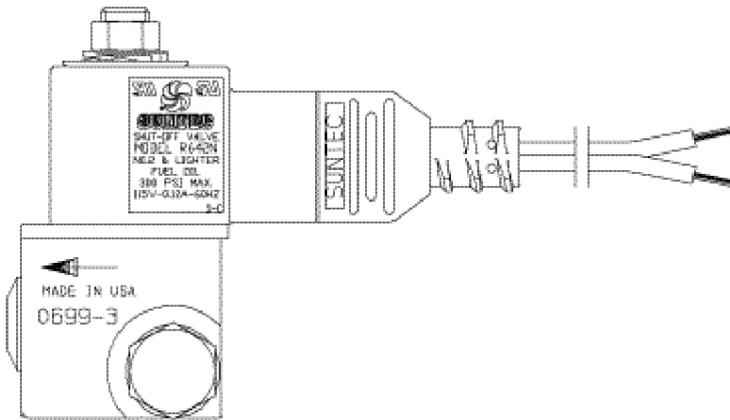

■ Fuels - Suitable for kerosene, No. 1 or No. 2 Fuel Oil

■ Solenoid

- - 24V, .5A, 60Hz
- - 115V, .1A, 60Hz
- - 220V, .05A, 50/60 Mz

Valve Model No.		Opening Response	Voltage (50/60 Hz.)	Max. Operating Pressure
Pump Mount	Burner Mount			
R642NL	C642NR	Non-Delay	115	300 psi
R641DL	C641DR	Delay 1-2 sec.	115	200 psi
R753NL	C753NR	Non-Delay	220	300 psi
R261NL	C261NR	Non-Delay	24AC/12VDC	300 psi
R643LL	C643LR	Delay 3-5 sec.	115	200 psi