
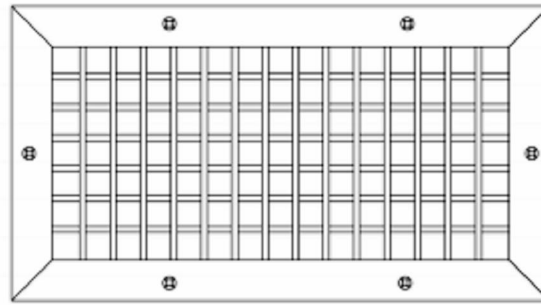


## 620-1-2 Aluminum Supply Grille - Double Deflection


### Core Style:

Double Deflection

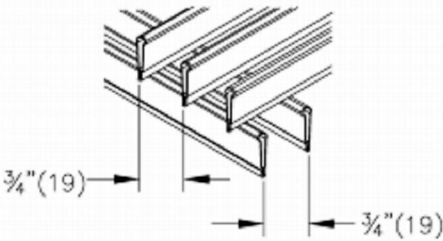


### Fastening:

A: Countersunk Screwholes  
c/w Screws



**Border:** F 1 1/4" (32) Flat Frame Standard

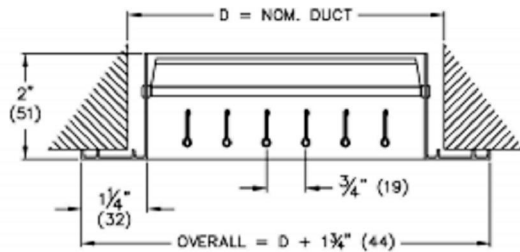

### Material:

- Aluminum

### Finish:

- B12 - Standard White

**Damper:** VCS3 Coated Steel Opposed Blade Damper (Mill Finish)



### Notes:

- Front blades parallel to Short dimension
- Individually adjustable roll formed blades on  $\frac{3}{4}" (19)$  centers
- VCS3 opposed blade damper, coated steel
- Factory tolerance  $\pm \frac{1}{32}" (1)$
- Visible mullions are included when blades are parallel to nominal size dimension larger than  $24" (610)$ .