


TYPICAL DISCHARGE PATTERN - ELEVATION

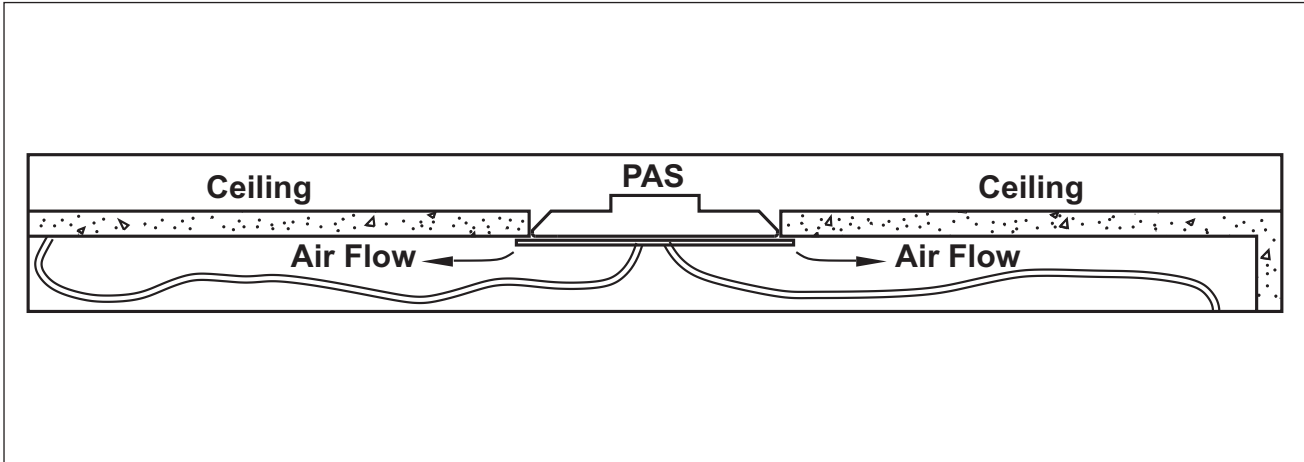

Nominal Duct Size D	Face or Ceiling Module Size					
	12x12	24x12	16x16	20x20	24x24	48x24
6 x 6	•	•	•	•	•	•
8 x 8			•	•	•	•
10 x 10	□			•	•	•
12 x 12					•	•
14 x 14			□			
15 x 15					•	•
18 x 6		•				
18 x 18				□	□	
22 x 10		□				
22 x 22					□	
46 x 22						□
6" Dia.	•	•	•	•	•	•
8" Dia.			•	•	•	•
10" Dia.			•	•	•	•
12" Dia.				•	•	•
14" Dia.				•	•	•
16" Dia.					•	•

• Available in supply models and return models

□ Available in return models only


•/□ Shaded areas indicate sizes available with aluminum face

DIMENSIONS

diffusers


MODELS PAS / PAS-AA / SUPPLY

Border Type 3
(Lay-In)

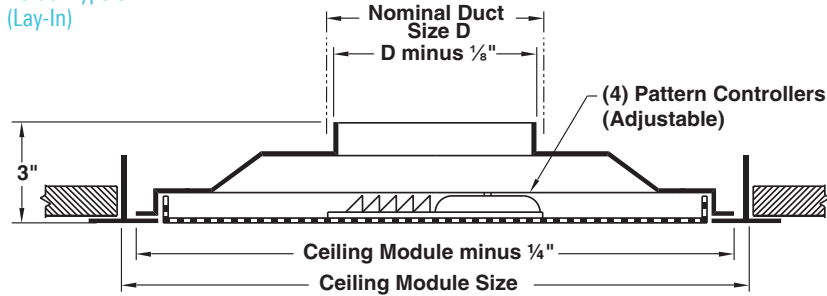


Border Type 4SL
(Spline Side Lock)


Note: 4SL can be installed after ceiling tiles are in place

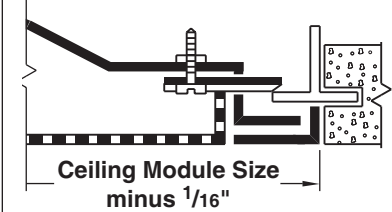


Border Type 1
(Surface Mount)

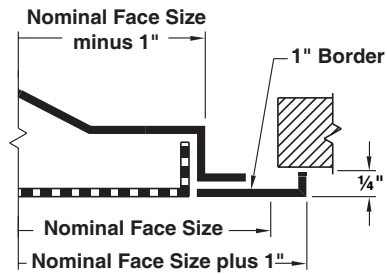

Border Type 2
(Snap-In)

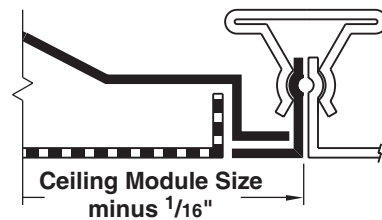


Border Type 4
(Spline)

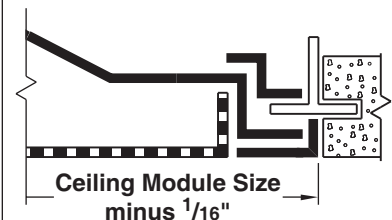


MODEL PDS - SUPPLY

Border Type 3
(Lay-In or Tegalur)
(Lay-In shown)

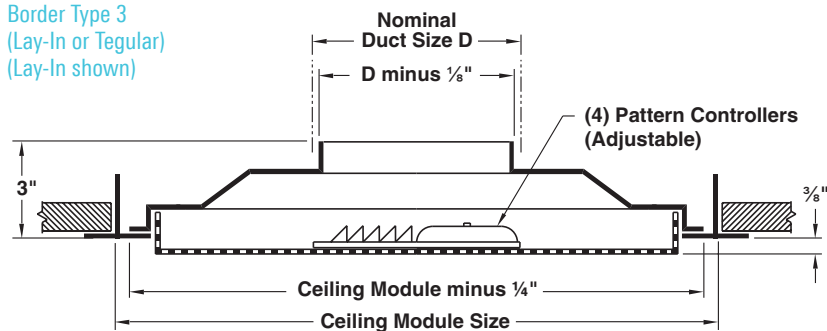


Border Type 4SL
(Spline Side Lock)


Note: 4SL can be installed after ceiling tiles are in place.

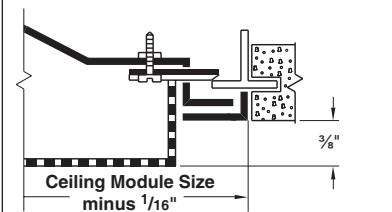


Border Type 1
(Surface Mount)

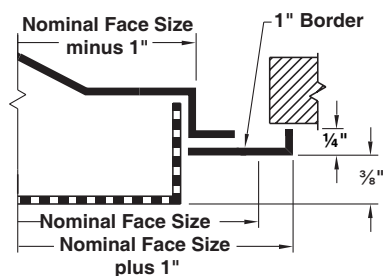

Border Type 2
(Snap-In)

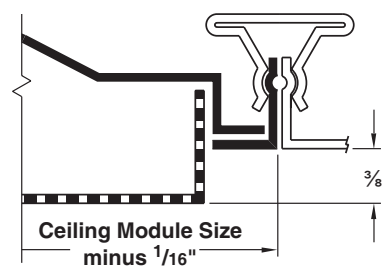

Border Type 4
(Spline)

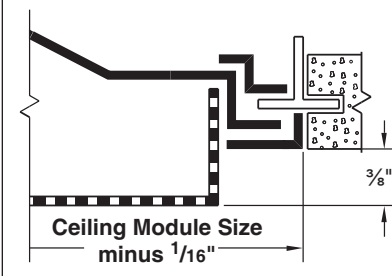




OPTIONAL MOLDED INSULATION BLANKET

Insulation is R-6 where blanket has the most depth. One" clearance on each side of neck is left for insulated duct connection. 24 x 24" module size only. Blanket is factory installed.

MODELS PAR, PAR-AA - RETURN

Border Type 3


(Lay-In when duct size = module size - 2)

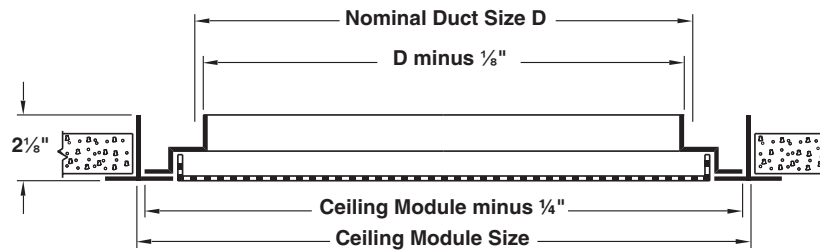

Border Type 4SL


(Spline Side Lock)

Note: 4SL can be installed after ceiling tiles are in place

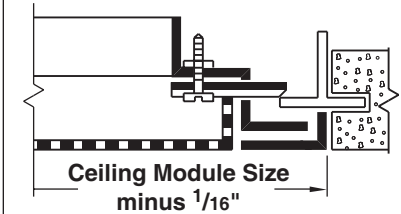


Border Type 3

(Lay-In for other standard duct sizes)

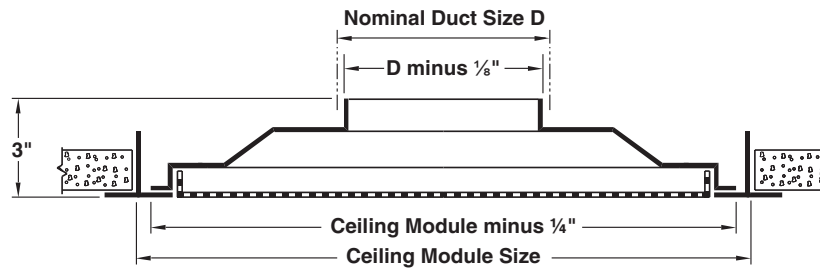


Border Type 4

(Spline)

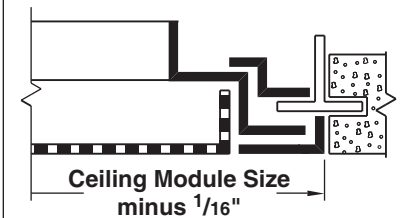

Border Type 1

(Surface Mount)

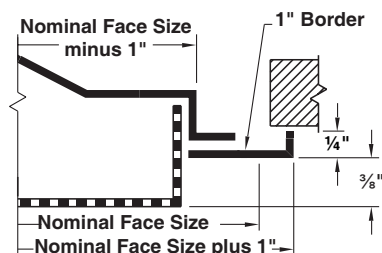

Border Type 2

(Snap-In)

