



Submittal Data Information

101-034

Model 0011 Cartridge Circulator

Effective: January 12, 2015

Supersedes: June 10, 2013

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	IMP. DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.

Features

- Exclusive ACB Anti-condensate baffle with ambient air flow-Protects motor windings against condensate buildup
- High velocity performance — compact design
- Quiet, Efficient operation
- Direct drive-Low power consumption
- Unique replaceable cartridge design — field serviceable
- Self lubricating
- No mechanical seal
- Unmatched reliability-maintenance free
- Universal flange to flange dimensions
- Cast Iron or Stainless Steel construction

Materials of Construction

Casing (Volute):.....Cast Iron or St. Steel
 Stator Housing:.....Aluminum
 Cartridge:.....Stainless Steel
 Impeller:.....Non-Metallic
 Shaft:.....Ceramic
 Bearings:.....Carbon
 O-Ring & Gaskets:.....EPDM


Model Nomenclature

F – Cast Iron, Flanged
 SF – Stainless Steel, Flanged

Performance Data

Max. Flow: 31 GPM
 Max. Head: 31 Feet
 Min. Fluid Temperature: 40°F (4°C)
 Max. Fluid Temperature: 230°F (110°C)
 Max. Working Pressure: 150 psi
 Connection Sizes:
 3/4", 1", 1-1/4", 1-1/2" Flanged

Certifications & Listings

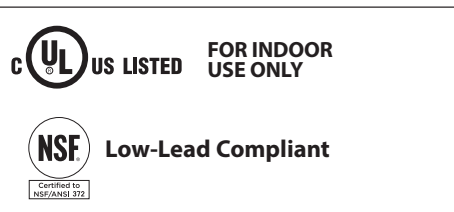


Application

The Taco 0011 is specifically designed for high head / medium flow applications in large residential or light commercial closed loop hydronic heating and chilled water cooling systems. Ideal for high pressure drop boilers, fan coil units, heat exchangers, large radiant heating and heat recovery/geothermal systems. The Stainless Steel 0011 can be used on open loop systems. The unique replaceable cartridge contains all of the moving parts and allows for easy service instead of replacing the entire circulator. Universal flange to flange dimensions and orientation allows the 0011 to easily replace other models. Compact, low power consumption design makes it ideal for high-efficiency jobs.

Pump Dimensions & Weights

Models	Casing	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
0011-F4	Cast Iron	7-1/2	191	6-1/8	156	3-1/2	89	3-3/8	86	5-5/8	143	6-1/2	165	12.0	5.5
0011-SF4	St. Steel	7-1/2	191	6-1/8	156	3-1/2	89	3-3/8	86	5-5/8	143	6-1/2	165	11.0	5.0


Mounting Positions

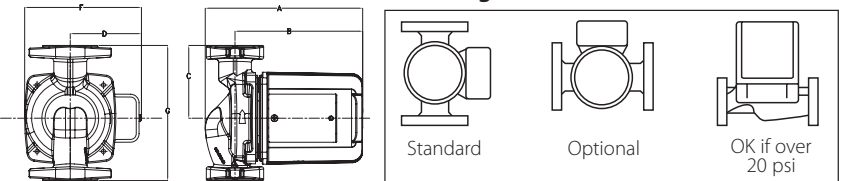


Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
All Models	115	60	1	1.76	3250	1/8
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

Flange Orientation



Performance Field - 60Hz

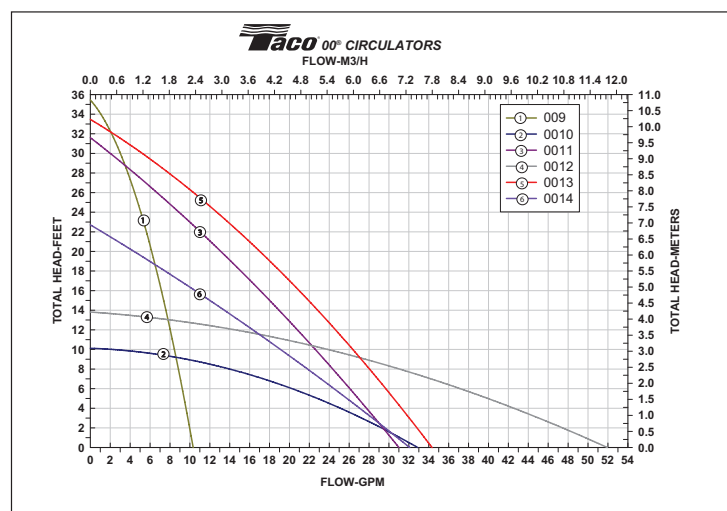

Do your best work.®

TACO INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360

TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436

Visit our website at: www.taco-hvac.com

Printed in USA

Copyright 2015

TACO, Inc.